

# Конвейерные тостеры

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [vha@nt-rt.ru](mailto:vha@nt-rt.ru) || сайт: <https://vollrath.nt-rt.ru/>



## 208-volt JT2 bread conveyor toaster

This Vollrath® JT2 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 10½-inch-wide conveyor can

fit up to 800 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 800 items per hour

1½-inch product opening easily fits products

## PRODUCT SPECIFICATIONS

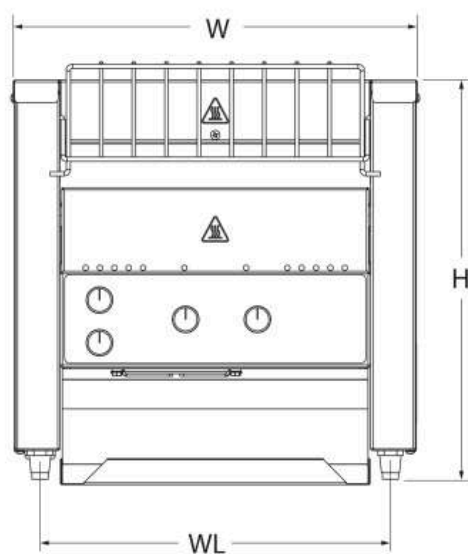

FRONT VIEW

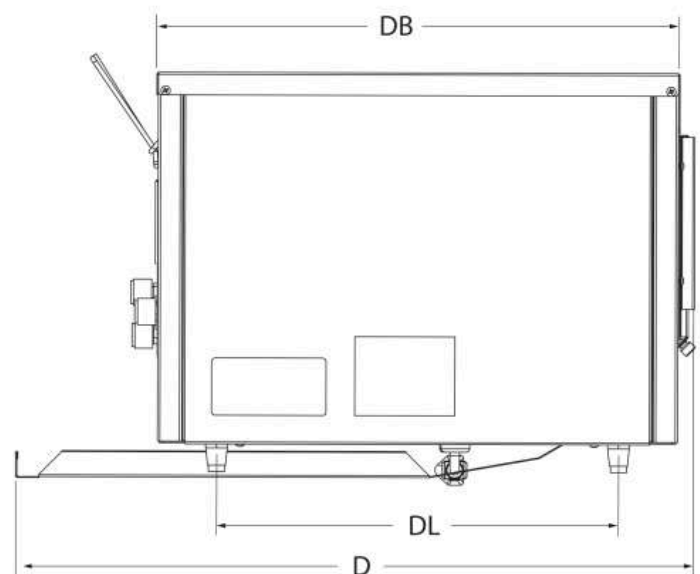

SIDE VIEW

## Model Information

Model

JT2

UPC

671080683348

## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 14
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	13.5
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P

Voltage	208
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
2PK HEAT ELEM11-3/8 104V 700W	59836
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
SHAFT IDLER 10.5"	B401341
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340

Name	Part #
BELT WIRE CONVEYOR 10.5"X30"	B204273
CT4 SIDE PANEL	B300037
CT4 TOAST CHUTE	B300012
CORD POWER 14/3 60" 6-20 PLUG	B401050
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
LOAD-UP RACK WIRE CT4	B400381
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
MOTOR FAN	B401211
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332



## 240-volt JT2 bread conveyor toaster

This Vollrath® JT2 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 10½-inch-wide conveyor can

fit up to 800 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 800 items per hour

1½-inch product opening easily fits products

## PRODUCT SPECIFICATIONS

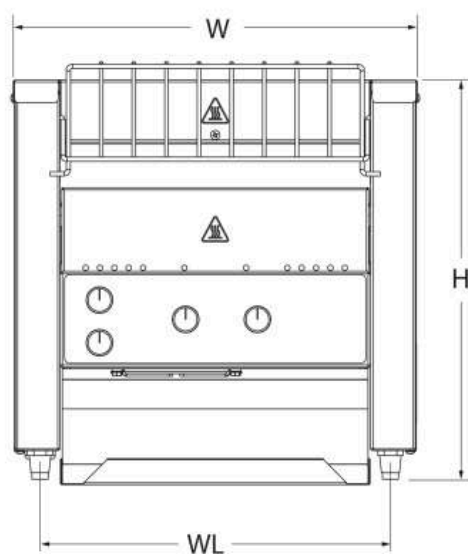

FRONT VIEW

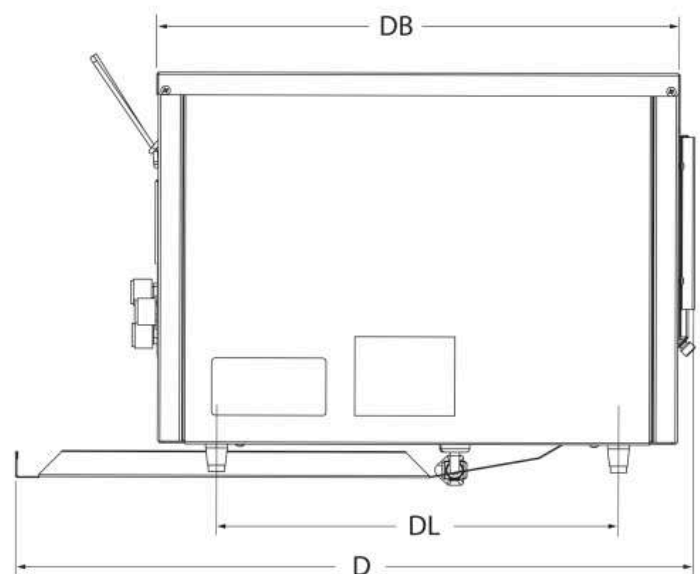

SIDE VIEW

## Model Information

Model

JT2

UPC

671080683362



## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 14
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	11.7
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P

Voltage	240
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
2PK HEAT ELEM 11-3/8 120V 700W	59854
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 SIDE PANEL	B300037
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
SWITCH FAN CERAMIC	B401107
SHAFT IDLER 10.5"	B401341

Name	Part #
BELT WIRE CONVEYOR 10.5"X30"	B204273
CORD POWER 14/3 60" 6-20 PLUG	B401050
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CT4 TOAST CHUTE	B300012
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100
MOTOR FAN	B401211
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260



## 208-volt JT2B bun and bagel conveyor toaster

This JT2B bun and bagel conveyor toaster by Vollrath is consistent, reliable and energy-efficient, making it the perfect choice for one-sided bun or bagel toasting. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 2-inch product opening is great for bun and

bagel halves, and the 10 ½-inch-wide conveyor can fit up to 1200 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

- Designed for one-sided toasting of bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Heavy-duty metal-sheathed heating elements work to toast buns and bagel halves properly
- Durable stainless and aluminized steel is built to last

Standby mode reduces energy use up to 75 percent

Maintenance-free drive system simplifies operation and servicing

10 ½-inch-wide conveyor fits up to 1200 items per hour

2-inch product opening easily fits products

PRODUCT SPECIFICATIONS

Model Information

Model	JT2B
UPC	671080705767

Unit Dimensions

Overall Dimensions (IN)	14.625 x 23.875 x 16.125
(W) Width (IN)	14.62
(D) Depth (IN)	23.87
(H) Height (IN)	16.12
(WL) Width between legs	12.625
(DL) Depth between legs	14.5
Product Opening Dimensions (IN)	2.25

Conveyor Width (IN)	10.5
Overall Dimensions (CM)	37.1 x 66.6 x 41
(W) Width (CM)	37.1
(D) Depth (CM)	66.6
(H) Height (CM)	41
(WL) Width between legs (CM)	32.1
(DL) Depth between legs (CM)	36.8
Product Opening Dimensions (CM)	5.7
Conveyor Width (CM)	26.7

### Electrical

Amps	15.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	208
Watts	3200

### Construction

Countertop or Drop-In	Countertop
Food Type	Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CT4B SIDE PANNEL	B300206
CORD POWER 12/3 6-20P	B401053
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
WIRE CONVEYOR BELT 10.5" X 33"	B205118
CONTROL SPEED 1000 OH CT4	B200911
32-TOOTH SPROCKET	B401302
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
LOAD-UP RACK WIRE CT4	B400381
CT4 TOAST CHUTE	B300012
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
UPPER METAL ELEMENT 208V 1400W	B403004
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CT4B CONTROL LABEL	B401412
LOWER METAL ELEMENT 104V 200W	B403002

Name	Part #
MOTOR FAN	B401211
SHAFT IDLER 10.5"	B401341
CHAIN DRIVE LADDER 19"	B401384
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330





## 240-volt JT3 bread conveyor toaster

This JT3 bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1 ½-inch product opening is great for bread slices or bun halves, and the 14 ½-inch-wide conveyor

can fit up to 1000 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


14 ½-inch-wide conveyor fits up to 1000 items per hour

1 ½-inch product opening easily fits products

## PRODUCT SPECIFICATIONS

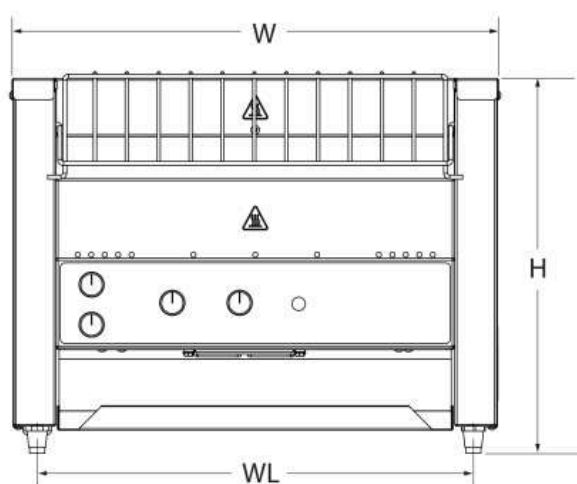

FRONT VIEW

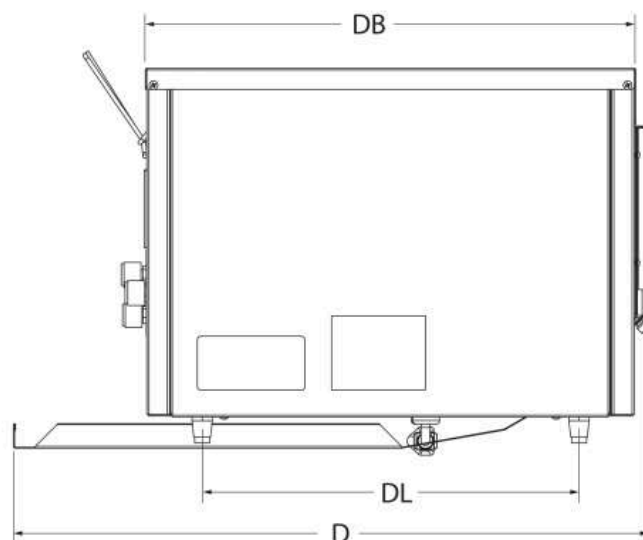

SIDE VIEW

## Model Information

Model

JT3

UPC

671080705743

## Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 14
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 35.6
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	15
------	----

Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	3600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
LABEL RESET CT4	B401425
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018

Name	Part #
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
2PK HEAT ELEM 15-3/8 120V 900W	59841
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CT4 18" LOAD-UP WIRE RACK	B400382
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CT4 18" CONTROL LABEL	B401402
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
7/8 WIRE CLAMP	B400331



## 208-volt JT3H bread conveyor toaster

This Vollrath® JT3H bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,

bagels, and more. The 14½-inch-wide conveyor can fit up to 950 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves, and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


14½-inch-wide conveyor fits up to 950 items per hour

1½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT **SPECIFICATIONS**

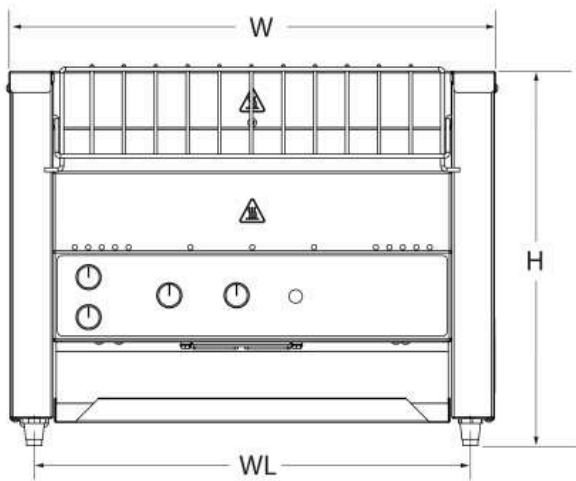

FRONT VIEW

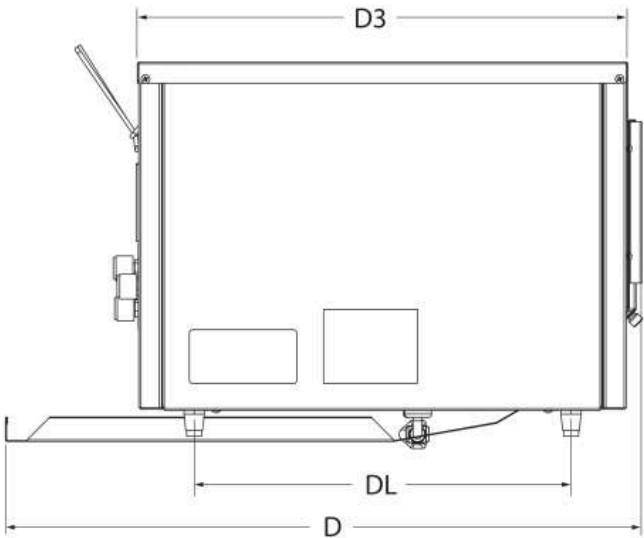

SIDE VIEW

**Model Information**

Model

JT3H

UPC

671080705835

## Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 15
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	15
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 38
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	38
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	17.3
Cord Length (IN)	54
Cord Length (CM)	140



Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	3600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
LABEL RESET CT4	B401425
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013

Name	Part #
CT4 18" LOAD-UP WIRE RACK	B400382
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
CT4 18" CONTROL LABEL	B401402
2PK HEAT ELEM 15-3/8 104V 900W	59839
MOTOR FAN	B401211
TERMINAL BLOCK 2 POSITION	B401034
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING, TEFLON 5/16	B401355
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
7/8 WIRE CLAMP	B400331
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300



## Set of two replacement release sheets for vertical contact toasters

Keep your Vollrath® vertical contact toaster running smoothly with this set of replacement release sheets. Designed specifically to prevent items from getting stuck in the toaster, these release sheets ensure easy removal when your bread or buns are done, and they're easy to clean and replace. Keep this set on hand to ensure a smooth toasting experience and consistent, high-quality results.

Designed to prevent items from getting stuck in the toaster, ensuring easy removal

Easy to clean and replace

Set of two release sheets

Use with your vertical contact toaster (Vollrath item number VCT4-208 or VCT4-240)

PRODUCT **SPECIFICATIONS**

**Model Information**

UPC	671080747859
-----	--------------

**Case Lot Measurement**



# Butter Wheel for CBT-15

Accessories for Vollrath's Conveyor Toasters & Ovens

## PRODUCT SPECIFICATIONS

### Model Information

UPC

671080747866



## 120-volt JT1 bread conveyor toaster

This Vollrath® JT1 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control helps you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 10½-inch-wide conveyor can fit up to 350 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control helps you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy



Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing

10½-inch-wide conveyor fits up to 350 items per hour

1½-inch product opening easily fits products

PRODUCT **SPECIFICATIONS**

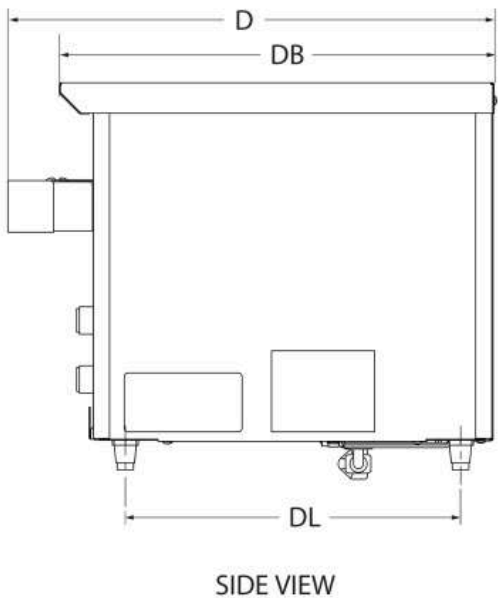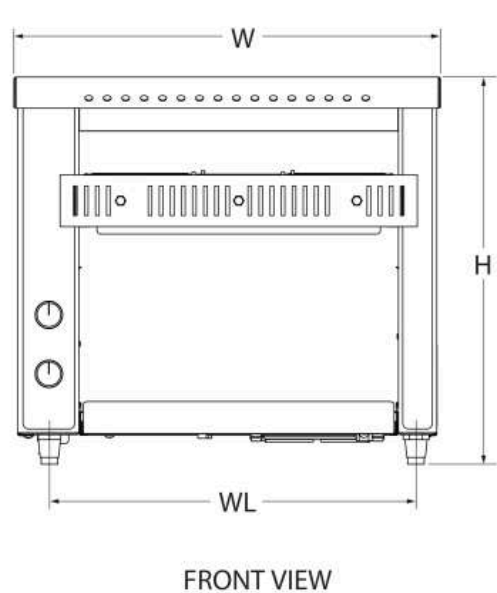

**Model Information**

Model	JT1
UPC	671080683317

**Unit Dimensions**

Overall Dimensions (IN)	14.5 x 16.5 x 13.125
(W) Width (IN)	14.5

(D) Depth (IN)	16.5
(H) Height (IN)	13.12
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1.375
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 33.3
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	33.3
(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	3.2
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

### Electrical

Amps	13.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P
Voltage	120
Watts	1600

### Construction



Construction Material	Stainless Steel
Construction Material 2	Aluminized Steel
Construction Material 3	Electrical Components
Countertop or Drop-In	Countertop
Material Type	Metals
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
14 Ga Straight Strain Relief	B400320
SILVER PUSH-ON KNOB	B405018
CONTROL SPEED 250 OHM CT2	B200902
TRAY SLIDE OUT	B300115
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CHAIN LADDER DRIVE 18.5"	B401389
LABEL CONTROL CT2	B401400
MOTOR DRIVE 120V REVERSED 346	B401202
CORD POWER 14/3 60" 5-15 PLUG	B401052
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
SPRING .038" DIA 1.500" LENGTH	B400261
CURVED FRONT CT2/CT2H	B300133

Name	Part #
RESET SWITCH	B401100
2PK HEAT ELEM 11-3/8 60V 400W	59843
SHAFT DRIVE 10.5"	B401340
BEARING ASSEMBLY 5/16	B201100
MOTOR FAN	B401209
BELT WIRE CONVEYOR 10.5"X25"	B204272
LEGS BLACK 1" 1/4-20	B400300
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BEARING, TEFLON 5/16	B401355
CORD WARNING LABEL	B401404
SIDE PANEL, CT2	B300111
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093
FRONT BEARING SPRING-LOADED	B401352
CT2 RIGHT SIDE LABEL	B204274



## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

Variable speed control allows for real-time adjustments.

10½" (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT SPECIFICATIONS

Model Information

Model	JT1
UPC	671080844305

Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 13.125
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	13.12
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1.375
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 33.3
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	33.3

(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	3.2
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

### Electrical

Amps	7.6
Hz	50/60
Plug	EU
Domestic / International	Europe
Voltage	220-240
Watts	1900

### Construction

Construction Material	Stainless Steel
Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
2PK HEAT ELEM 11-3/8	59893
14 Ga Straight Strain Relief	B400320
SILVER PUSH-ON KNOB	B405018

Name	Part #
TRAY SLIDE OUT	B300115
LABEL CONTROL CT2	B401400
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CHAIN LADDER DRIVE 18.5"	B401389
SHAFT DRIVE 10.5"	B401340
MOTOR DRIVE 230/240V 50 HZ R	B401206
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
CONTROL SPEED 500 OHM	B200906
SPRING .038" DIA 1.500" LENGTH	B400261
CURVED FRONT CT2/CT2H	B300133
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BELT WIRE CONVEYOR 10.5"X25"	B204272
LEGS BLACK 1" 1/4-20	B400300
CT2 RIGHT SIDE LABEL	B204274
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
SIDE PANEL, CT2	B300111
1 1/4" SNAP BUSHING	B400330
MOTOR FAN	B401211

Name	Part #
BEARING, TEFLON 5/16	B401355
CT2 RESET LABEL	B401093



## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.



Variable speed control allows for real-time adjustments.

Up to 350 slices or bun halves/hour

10½" (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

Stainless steel and aluminized steel construction.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT SPECIFICATIONS

Model Information

Model	JT1
UPC	671080827841

Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 13.125
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	13.12
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1.375
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 33.3
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	33.3

(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	3.2
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

### Electrical

Amps	7.6
Hz	50/60
Plug	UK
Domestic / International	United Kingdom
Voltage	220-240
Watts	1900

### Construction

Construction Material	Stainless Steel
Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
2PK HEAT ELEM 11-3/8	59893
14 Ga Straight Strain Relief	B400320
CORD FAN HP-75.24-A	B401060

Name	Part #
SPROCKET 25B17-8MM	B401300
CHAIN LADDER DRIVE 18.5"	B401389
SILVER PUSH-ON KNOB	B405018
TRAY SLIDE OUT	B300115
LABEL CONTROL CT2	B401400
SHAFT DRIVE 10.5"	B401340
MOTOR DRIVE 230/240V 50 HZ R	B401206
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
CONTROL SPEED 500 OHM	B200906
SPRING .038" DIA 1.500" LENGTH	B400261
CORD UK 13 AMP FUSE	B401054
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BELT WIRE CONVEYOR 10.5"X25"	B204272
LEGS BLACK 1" 1/4-20	B400300
CT2 RIGHT SIDE LABEL	B204274
CURVED FRONT CT2/CT2H	B300133
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
MOTOR FAN	B401211
CORD WARNING LABEL	B401404

Name	Part #
SIDE PANEL, CT2	B300111
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093



## 120-volt JT1B bun or bagel conveyor toaster

This Vollrath® JT1B bun or bagel conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and the one- or two-sided heat switch help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 10½-inch-wide conveyor can

fit up to 500 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves, and bagel halves

Variable-speed control and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 500 items per hour

1½-inch product opening easily fits products

## PRODUCT SPECIFICATIONS

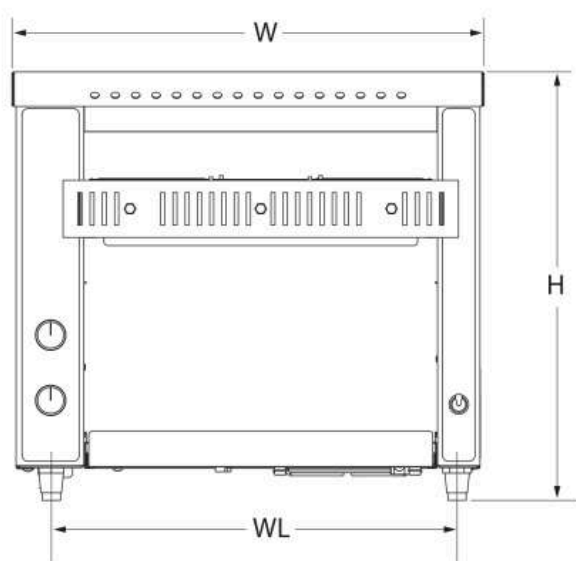

FRONT VIEW

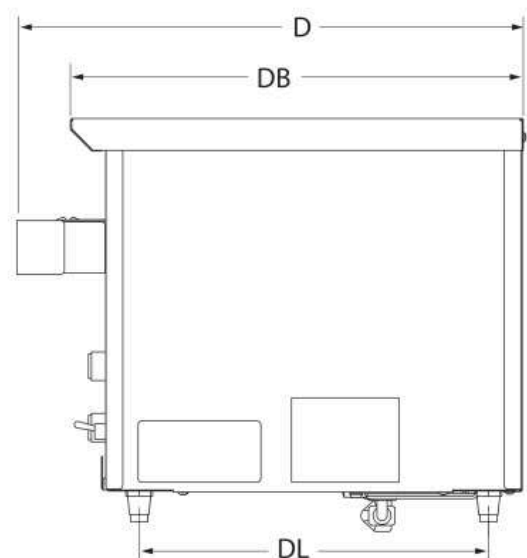

SIDE VIEW

## Model Information

Model

JT1B

UPC

671080705682

### Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 13.125
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	13.12
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1.375
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 33.3
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	33.3
(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	3.2
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

### Electrical

Amps	13.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P

Voltage	120
Watts	1600

### Construction

Construction Material	Stainless Steel
Construction Material 2	Aluminized Steel
Construction Material 3	Electrical Components
Countertop or Drop-In	Countertop
Material Type	Metals
Food Type	Standard Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
2PK HEAT ELEM 11-3/8 60V 400W	59843
SILVER PUSH-ON KNOB	B405018
CONTROL SPEED 250 OHM CT2	B200902
TRAY SLIDE OUT	B300115
SILVER PUSH-ON KNOB W/SET SCRW	B405019
14 Ga Straight Strain Relief	B400320
RIGHT SIDE LABEL W/ HOLE	B401442
SHAFT DRIVE 10.5"	B401340
LABEL CONTROL CT2	B401400
MOTOR DRIVE 120V REVERSED 346	B401202



Name	Part #
CORD POWER 14/3 60" 5-15 PLUG	B401052
MOTOR FAN	B401209
CHAIN LADDER DRIVE 18.5"	B401389
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
SWITCH TOGGLE ON/ON 15A	B401116
HEYCO 1" SNAP BUSHING 2140	B400334
SPRING .038" DIA 1.500" LENGTH	B400261
CURVED FRONT CT2/CT2H	B300133
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
SIDE PANEL, CT2	B300111
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
CT2 RESET LABEL	B401093
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
BELT WIRE CONVEYOR 10.5"X25"	B204272
LEGS BLACK 1" 1/4-20	B400300



## 120-volt JT1BH bun or bagel conveyor toaster

This Vollrath® JT1BH bun or bagel conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and the one- or two-sided heat switch help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 2 1/8-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more.

The 10 1/2-inch-wide conveyor can fit up to 400 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves, and bagel halves

Variable-speed control and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10 1/2-inch-wide conveyor fits up to 400 items per hour

2 1/8-inch product opening easily fits buns, bagels, and other high-clearance items

## PRODUCT SPECIFICATIONS

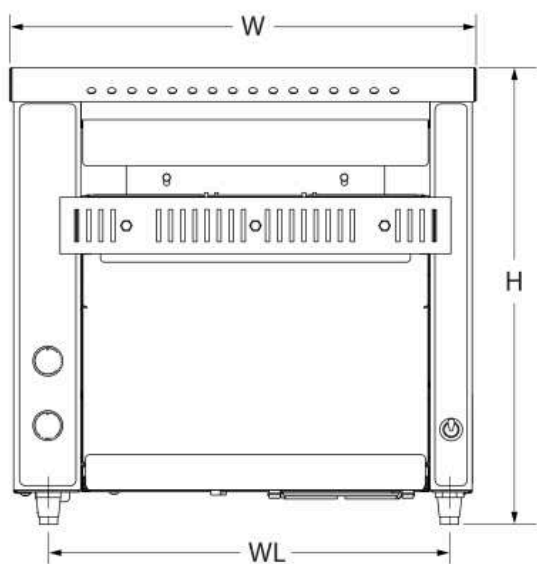

FRONT VIEW

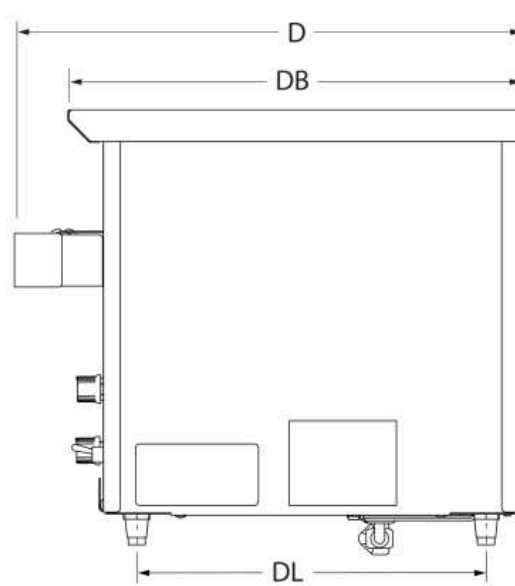

SIDE VIEW

## Model Information

Model

JT1BH

UPC

671080705699

## Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 14.125
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	14.12
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	2.125
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 35.9
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	35.9
(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	7.6
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

## Electrical

Amps	13.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P

Voltage	120
Watts	1600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB	B405018
CONTROL SPEED 250 OHM CT2	B200902
TRAY SLIDE OUT	B300115
SILVER PUSH-ON KNOB W/SET SCRW	B405019
14 Ga Straight Strain Relief	B400320
JT1H SWING SHUTTER	B300131
MOTOR DRIVE 120V REVERSED 346	B401202
CORD POWER 14/3 60" 5-15 PLUG	B401052
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
CT2BH RIGHT SIDE LABEL W/HOLE	B405005

Name	Part #
HEYCO 1" SNAP BUSHING 2140	B400334
SPRING .038" DIA 1.500" LENGTH	B400261
MOTOR FAN	B401209
BELT WIRE CONVEYOR 10.5"X25"	B204272
CHAIN DRIVE LADDER 19"	B401384
SWITCH TOGGLE ON/ON 15A	B401116
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LEGS BLACK 1" 1/4-20	B400300
CORD WARNING LABEL	B401404
SIDE PANEL CT2H	B300123
CURVED FRONT CT2/CT2H	B300133
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093
2PK HEAT ELEM 11-3/8 60V 400W	59843
SHAFT DRIVE 10.5"	B401340
CT2H CONTROL LABEL	B401109



## 120-volt JT1H bread conveyor toaster

This Vollrath® JT1H bread conveyor toaster is consistent, reliable, and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control helps you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 2½-inch product opening allows for toasting of larger items, making this toaster ideal for buns, bagels, and other high-clearance items. The 10½-inch-

wide conveyor can fit up to 250 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control helps you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 250 items per hour

2½-inch product opening easily fits buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

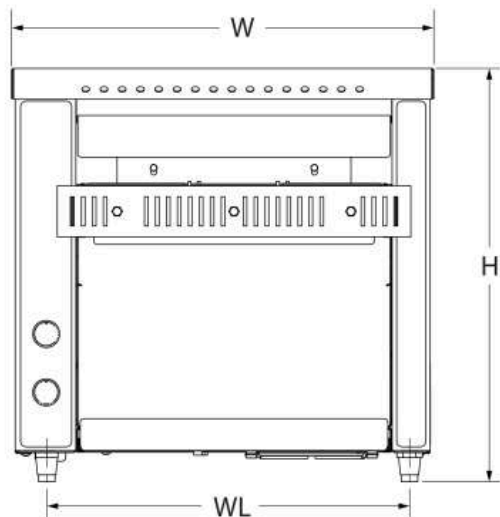

FRONT VIEW

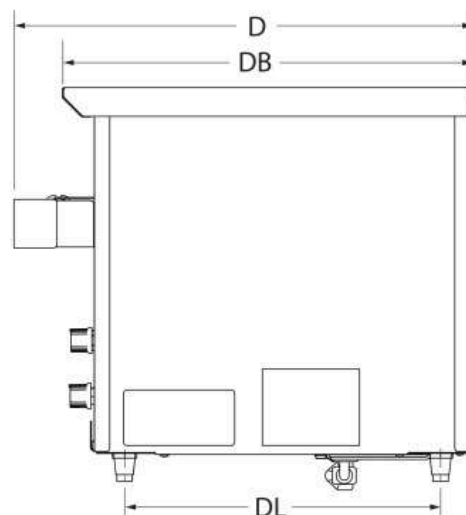

SIDE VIEW

### Model Information

Model

JT1H

UPC

671080683324



## Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 14.187
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	14.18
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1 - 2.125
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 36
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	36
(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	2.5 - 7.6
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

## Electrical

Amps	13.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P

Voltage	120
Watts	1600

### Construction

Construction Material	Stainless Steel
Construction Material 2	Aluminized Steel
Construction Material 3	Electrical Components
Countertop or Drop-In	Countertop
Material Type	Metals
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
14 Ga Straight Strain Relief	B400320
SILVER PUSH-ON KNOB	B405018
CONTROL SPEED 250 OHM CT2	B200902
TRAY SLIDE OUT	B300115
MOTOR DRIVE 120V REVERSED 346	B401202
CORD POWER 14/3 60" 5-15 PLUG	B401052
MOTOR FAN	B401209
2PK HEAT ELEM 11-3/8 60V 400W	59843
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033

Name	Part #
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
JT1H SWING SHUTTER	B300131
SPRING .038" DIA 1.500" LENGTH	B400261
CURVED FRONT CT2/CT2H	B300133
BELT WIRE CONVEYOR 10.5"X25"	B204272
CHAIN DRIVE LADDER 19"	B401384
LEGS BLACK 1" 1/4-20	B400300
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CT2H CONTROL LABEL	B401109
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CORD WARNING LABEL	B401404
SIDE PANEL CT2H	B300123
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093
LABEL 1 X 11.845	B405004
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355



DISCONTINUED

## International Conveyor Toasters

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve  
desired color.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT1H
-------	------

**Unit Dimensions**

Overall Dimensions (IN)	14.5 x 16.5 x 14.187
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	14.18
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1 - 2.125
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 36
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	36
(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	2.5 - 7.6
(DB) Depth of Body (CM)	37.5

Conveyor Width (CM)	26.7
---------------------	------

## Electrical

Amps	7.6
------	-----

Hz	50/60
----	-------

Plug	Schuko
------	--------

Domestic / International	Europe
--------------------------	--------

Voltage	220 - 240
---------	-----------

Watts	1900
-------	------

## Construction

Countertop or Drop-In	Countertop
-----------------------	------------

Food Type	Standard Breads, Specialty Breads, Buns, Bagels
-----------	-------------------------------------------------

## PRODUCT PARTS

Name	Part #
------	--------

SILVER PUSH-ON KNOB W/SET SCRW	B405019
--------------------------------	---------

2PK HEAT ELEM 11-3/8	59893
----------------------	-------

14 Ga Straight Strain Relief	B400320
------------------------------	---------

CORD FAN HP-75.24-A	B401060
---------------------	---------

SPROCKET 25B17-8MM	B401300
--------------------	---------

SHAFT DRIVE 10.5"	B401340
-------------------	---------

CONTROL SPEED 500 OHM	B200906
-----------------------	---------

JT1H SWING SHUTTER	B300131
--------------------	---------

TERMINAL BLOCK 5 POSITION	B401033
---------------------------	---------

GUARD FAN	B401220
-----------	---------

Name	Part #
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
MOTOR DRIVE 230/240V 50 HZ R	B401206
SPRING .038" DIA 1.500" LENGTH	B400261
CURVED FRONT CT2/CT2H	B300133
SILVER PUSH-ON KNOB	B405018
TRAY SLIDE OUT	B300115
BEARING ASSEMBLY 5/16	B201100
BELT WIRE CONVEYOR 10.5"X25"	B204272
CHAIN DRIVE LADDER 19"	B401384
LEGS BLACK 1" 1/4-20	B400300
SWITCH ROTARY POWER SAVER	B401103
CT2H CONTROL LABEL	B401109
TERMINAL BLOCK 2 POSITION	B401034
CORD WARNING LABEL	B401404
SIDE PANEL CT2H	B300123
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093
LABEL 1 X 11.845	B405004
BEARING, TEFLON 5/16	B401355
RESET SWITCH	B401100
MOTOR FAN	B401211



DISCONTINUED

## International Conveyor Toasters

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.



Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

10½" (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

Up to 250 slices or bun halves/hour.

2-1/8" product opening.

High-quality, insulated wires help prevent against dry rotting and cracking.

## PRODUCT SPECIFICATIONS

### Model Information

Model	JT1H
-------	------

### Unit Dimensions

Overall Dimensions (IN)	14.5 x 16.5 x 14.187
(W) Width (IN)	14.5
(D) Depth (IN)	16.5
(H) Height (IN)	14.18
(WL) Width between legs	12.437
(DL) Depth between legs	11.312
Product Opening Dimensions (IN)	1 - 2.125
(DB) Depth of Body (IN)	14.75
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	36.8 x 41.9 x 36
(W) Width (CM)	36.8
(D) Depth (CM)	41.9
(H) Height (CM)	36

(WL) Width between legs (CM)	31.6
(DL) Depth between legs (CM)	28.7
Product Opening Dimensions (CM)	2.5 - 7.6
(DB) Depth of Body (CM)	37.5
Conveyor Width (CM)	26.7

### Electrical

Amps	7.6
Hz	50/60
Plug	UK
Domestic / International	United Kingdom
Voltage	220 - 240
Watts	1900

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
2PK HEAT ELEM 11-3/8	59893
14 Ga Straight Strain Relief	B400320
SILVER PUSH-ON KNOB	B405018
TRAY SLIDE OUT	B300115
TERMINAL BLOCK 5 POSITION	B401033

Name	Part #
GUARD FAN	B401220
SHAFT IDLER 10.625" CT2	B401344
FRONT BEARING SPRING-LOADED	B401352
SHAFT DRIVE 10.5"	B401340
MOTOR DRIVE 230/240V 50 HZ R	B401206
SPRING .038" DIA 1.500" LENGTH	B400261
CORD UK 13 AMP FUSE	B401054
CURVED FRONT CT2/CT2H	B300133
RESET SWITCH	B401100
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
BELT WIRE CONVEYOR 10.5"X25"	B204272
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CT2H CONTROL LABEL	B401109
CONTROL SPEED 500 OHM	B200906
JT1H SWING SHUTTER	B300131
MOTOR FAN	B401211
CHAIN DRIVE LADDER 19"	B401384
LEGS BLACK 1" 1/4-20	B400300
CORD WARNING LABEL	B401404
SIDE PANEL CT2H	B300123
1 1/4" SNAP BUSHING	B400330
CT2 RESET LABEL	B401093
LABEL 1 X 11.845	B405004

Name	Part #
TERMINAL BLOCK 2 POSITION	B401034
BEARING, TEFLON 5/16	B401355



## 208-volt JT4 dual conveyor toaster

This JT4 dual conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. With two conveyors, you can easily fit up to 1,100 bread slices or bun halves per hour. The top conveyor has an opening that can adjust from 1 ½ to 3 inches, and the bottom conveyor adjusts from closed to a 1 ½-inch opening. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Perfect for bread slices and bun halves

Dual design maximizes vertical space, providing two toasting options in the footprint of one

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last

Standby mode reduces energy use up to 75 percent

Maintenance-free drive system simplifies operation and servicing

Two conveyors easily fit up to 1,100 bread slices or bun halves per hour

Top conveyor opening adjusts from 1 ½ to 3 inches

Bottom conveyor opening adjusts from closed to a 1 ½-inch opening

## PRODUCT SPECIFICATIONS

### Model Information

Model	JT4
UPC	671080720418

### Unit Dimensions

Overall Dimensions (IN)	20.25 x 28.75 x 23.5
(W) Width (IN)	20.25
(D) Depth (IN)	28.75
(H) Height (IN)	23.5
(WL) Width between legs	17.375
(DL) Depth between legs	15.5
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5

Overall Dimensions (CM)	51.4 x 73 x 59.7
(W) Width (CM)	51.4
(D) Depth (CM)	73
(H) Height (CM)	59.7
(WL) Width between legs (CM)	44.2
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

**Electrical**

Amps	23.6
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	4900

**Construction**

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

**Case Lot Measurement**

PRODUCT **PARTS**

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SHAFT IDLER	B401349
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
CT4-DUAL SIDE PANEL	B300230
CT4-2000 NOSE GUARD	B300807
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V REVERSED	B401203
LOWER CHAMBER LABEL	B401424
CORD POWER 12/3 60" 6-30P	B401051
UPPER CHAMBER LABEL	B401423
2PK HEAT ELEM15-3/8 69.3V 413W	59851
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
CONTROL SPEED 500 OHM CT4	B200901
SO2 14.5" CRUMB TRAY ASSM	B205129
BEARING ASSEMBLY 5/16	B201100



Name	Part #
SWITCH ROTARY POWER SAVER	B401103
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
CHAIN LADDER 13.25."	B401386
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211



## 220V Dual Conveyor Toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power

Variable speed control to achieve desired color

Two toasting chambers in one unit

220V

Up to 1,100 slices or bun halves/hour  
when using both chambers

Suggested for medium-volume  
applications that need to toast different  
items simultaneously

Top chamber has 1 ½"-3" adjustable  
product opening; bottom chamber  
adjusts from closed to a 1 ½" product  
opening

Independent heat controls and Standby  
Mode for each chamber for added  
versatility and energy efficiency

## PRODUCT SPECIFICATIONS

### Model Information

Model	JT4
UPC	671080720425

### Unit Dimensions

Overall Dimensions (IN)	20.25 x 28.75 x 23.5
(W) Width (IN)	20.25
(D) Depth (IN)	28.75
(H) Height (IN)	23.5
(WL) Width between legs	17.375
(DL) Depth between legs	15.5
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	51.4 x 73 x 59.7
(W) Width (CM)	51.4
(D) Depth (CM)	73
(H) Height (CM)	59.7

(WL) Width between legs (CM)	44.2
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

**Electrical**

Amps	22.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	4900

**Construction**

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

**Case Lot Measurement**

PRODUCT **PARTS**

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300

Name	Part #
CT4-2000 NOSE GUARD	B300807
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
2PK HEAT ELEM11-3/8 73.3V 413W	59888
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
MOTOR DRIVE 208/240V REVERSED	B401203
LOWER CHAMBER LABEL	B401424
SO2 14.5" CRUMB TRAY ASSM	B205129
CT4-DUAL SIDE PANEL	B300230
UPPER CHAMBER LABEL	B401423
LEGS BLACK 1" 1/4-20	B400300
CT4 18" TOAST CHUTE	B300013
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CHAIN LADDER 13.25"	B401386

Name	Part #
CONTROL SPEED 500 OHM CT4	B200901
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330



## Dual Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

14½" (36.8 cm) 3-slice wide conveyors are larger than industry standard for better toasting results.

Top chamber product entry opening is adjustable from 1½" - 3" (3.8 - 7.6 cm).

Bottom chamber product entry opening is adjustable up to 1½" (3.8 cm).

PRODUCT SPECIFICATIONS

Model Information

Model	JT4
UPC	671080844336

Unit Dimensions

Overall Dimensions (IN)	20.25 x 28.75 x 23.5
(W) Width (IN)	20.25
(D) Depth (IN)	28.75
(H) Height (IN)	23.5
(WL) Width between legs	17.375
(DL) Depth between legs	15.5
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	51.4 x 73 x 59.7
(W) Width (CM)	51.4
(D) Depth (CM)	73
(H) Height (CM)	59.7



(WL) Width between legs (CM)	44.2
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

### Electrical

Amps	19.8
Hz	50/60
Plug	Stripped ends
Domestic / International	International
Voltage	220-240
Watts	4950

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SHAFT IDLER	B401349

Name	Part #
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
CT4-DUAL SIDE PANEL	B300230
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
CT4-2000 NOSE GUARD	B300807
MOTOR DRIVE 208/240V REVERSED	B401203
2PK HEAT ELEM 15-3/8 80V 413W	59852
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
SO2 14.5" CRUMB TRAY ASSM	B205129
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LOWER CHAMBER LABEL	B401424
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211
UPPER CHAMBER LABEL	B401423
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CONTROL SPEED 500 OHM CT4	B200901

Name	Part #
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CHAIN LADDER 13.25."	B401386
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 240-volt JT4 dual conveyor toaster

This JT4 dual conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. With two conveyors, you can easily fit up to 1,100 bread slices or bun halves per hour. The top conveyor has an opening that can adjust from 1 ½ to 3 inches, and the bottom conveyor adjusts from closed to a 1 ½-inch opening. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Perfect for bread slices and bun halves

Dual design maximizes vertical space, providing two toasting options in the footprint of one

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last

Standby mode reduces energy use up to 75 percent

Maintenance-free drive system simplifies operation and servicing

Two conveyors easily fit up to 1,100 bread slices or bun halves per hour

Top conveyor opening adjusts from 1 ½ to 3 inches

Bottom conveyor opening adjusts from closed to a 1 ½-inch opening

## PRODUCT SPECIFICATIONS

### Model Information

Model	JT4
UPC	671080720432

### Unit Dimensions

Overall Dimensions (IN)	20.25 x 28.75 x 23.5
(W) Width (IN)	20.25
(D) Depth (IN)	28.75
(H) Height (IN)	23.5
(WL) Width between legs	17.375
(DL) Depth between legs	15.5
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5

Overall Dimensions (CM)	51.4 x 73 x 59.7
(W) Width (CM)	51.4
(D) Depth (CM)	73
(H) Height (CM)	59.7
(WL) Width between legs (CM)	44.2
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

## Electrical

Amps	20.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	4900

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
CT4-DUAL SIDE PANEL	B300230
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
CT4-2000 NOSE GUARD	B300807
MOTOR DRIVE 208/240V REVERSED	B401203
2PK HEAT ELEM 15-3/8 80V 413W	59852
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
SO2 14.5" CRUMB TRAY ASSM	B205129
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LOWER CHAMBER LABEL	B401424
WIRE CONVEYOR BELT 14.5" X 42"	B205138

Name	Part #
MOTOR FAN	B401211
UPPER CHAMBER LABEL	B401423
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CONTROL SPEED 500 OHM CT4	B200901
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CHAIN LADDER 13.25."	B401386
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331





## 120-volt JT2 bread conveyor toaster

This Vollrath® JT2 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 10½-inch-wide conveyor can fit up to 450 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 450 items per hour

1½-inch product opening easily fits products

PRODUCT SPECIFICATIONS

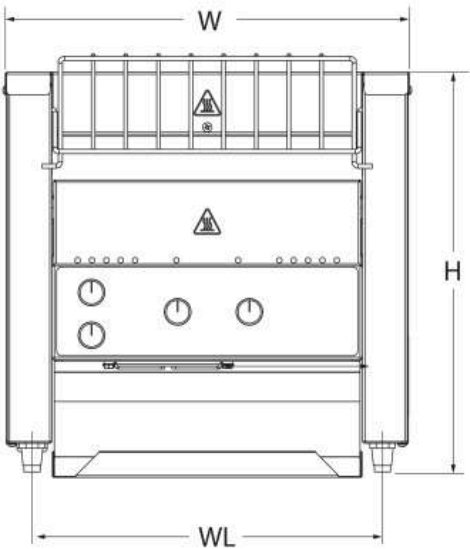

FRONT VIEW

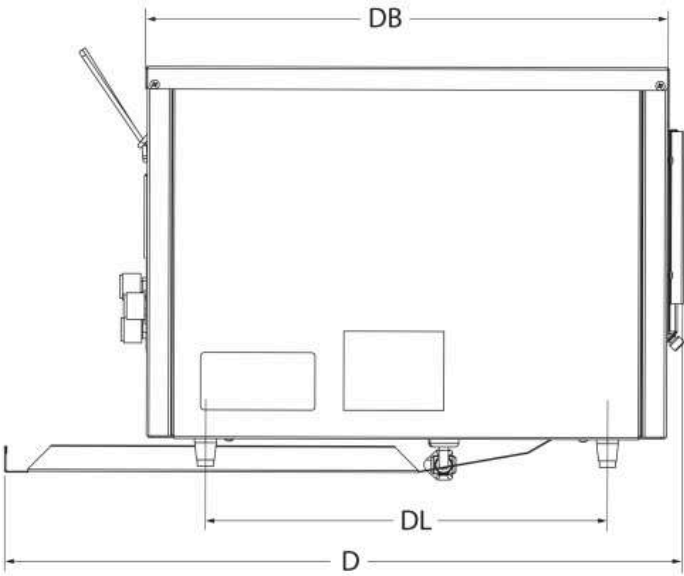

SIDE VIEW

Model Information

Model	JT2
UPC	671080683331

Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 14
-------------------------	---------------------

(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	14.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P
Voltage	120
Watts	1700

## Construction

Countertop or Drop-In

Countertop

Food Type

Standard Breads

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH 120 V	B401101
14 Ga Straight Strain Relief	B400320
CONTROL SPEED 250 OHM CT4	B200900
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 120V RMS 345	B401200
CT4 SIDE PANEL	B300037
CT4 TOAST CHUTE	B300012
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
SHAFT IDLER 10.5"	B401341
CORD POWER 14/3 60" 5-15 PLUG	B401052

Name	Part #
MOTOR FAN	B401209
CHAIN LADDER DRIVE 15"	B401388
GUARD FAN	B401220
LOAD-UP RACK WIRE CT4	B400381
BEARING ASSEMBLY 5/16	B201100
BELT WIRE CONVEYOR 10.5"X30"	B204273
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
LEGS BLACK 1" 1/4-20	B400300
7/8 WIRE CLAMP	B400331
5/8 SNAP BUSHING	B400332
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034



## 220-volt 2800 watts JT2 bread conveyor toaster

This JT2 bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1 ½-inch product opening is great for bread slices or bun halves, and the 10 ½-inch-wide conveyor

can fit up to 800 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


10 ½-inch-wide conveyor fits up to 800 items per hour

1 ½-inch product opening easily fits products

PRODUCT SPECIFICATIONS

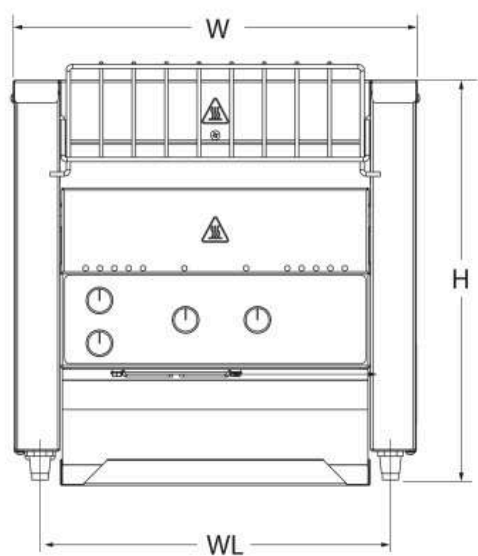

FRONT VIEW

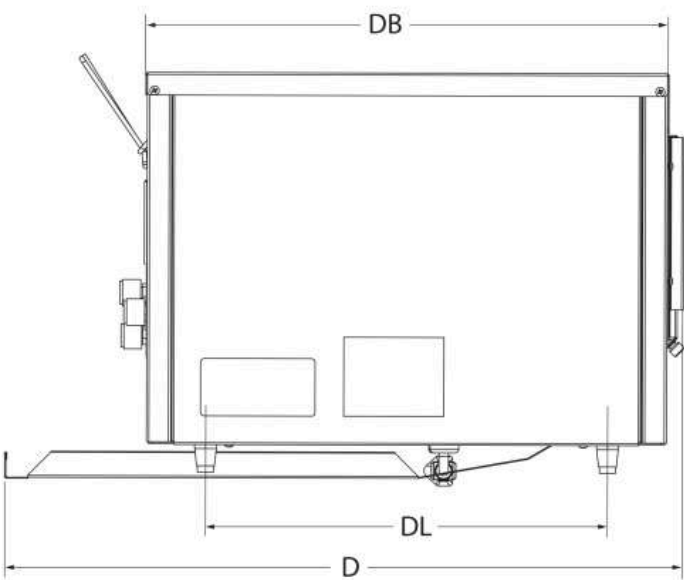

SIDE VIEW

Model Information

Model

JT2

UPC

671080683355

**Unit Dimensions**

Overall Dimensions (IN)	14.125 x 23.75 x 14
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

**Electrical**

Amps	12.7
Cord Length (IN)	54
Cord Length (CM)	140



Hz	60
Plug	NEMA 6-20P
Voltage	220
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
TERMINAL BLOCK 5 POSITION	B401033
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CT4 SIDE PANEL	B300037
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
SHAFT IDLER 10.5"	B401341

Name	Part #
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
2PK HEAT ELEM 11-3/8 110V 700W	59838
CORD POWER 14/3 60" 6-20 PLUG	B401050
CONTROL SPEED 500 OHM CT4	B200901
CT4 TOAST CHUTE	B300012
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
BELT WIRE CONVEYOR 10.5"X30"	B204273
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
5/8 SNAP BUSHING	B400332



## 208-volt JT3 bread conveyor toaster

This Vollrath® JT3 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1½-inch product opening is great for bread slices or bun halves, and the 14½-inch-wide conveyor can

fit up to 1,000 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


14½-inch-wide conveyor fits up to 1,000 items per hour

1½-inch product opening easily fits products

## PRODUCT SPECIFICATIONS

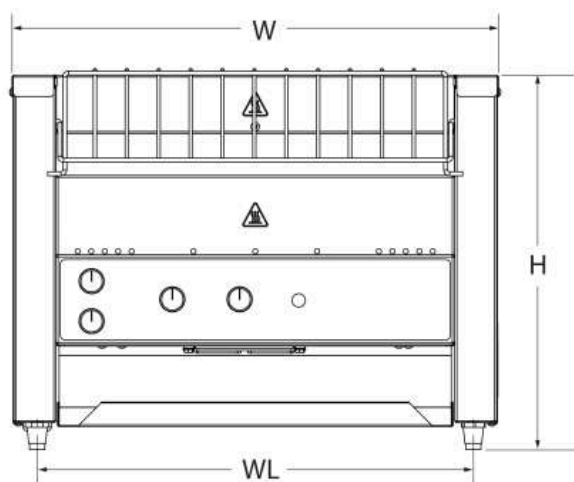

FRONT VIEW

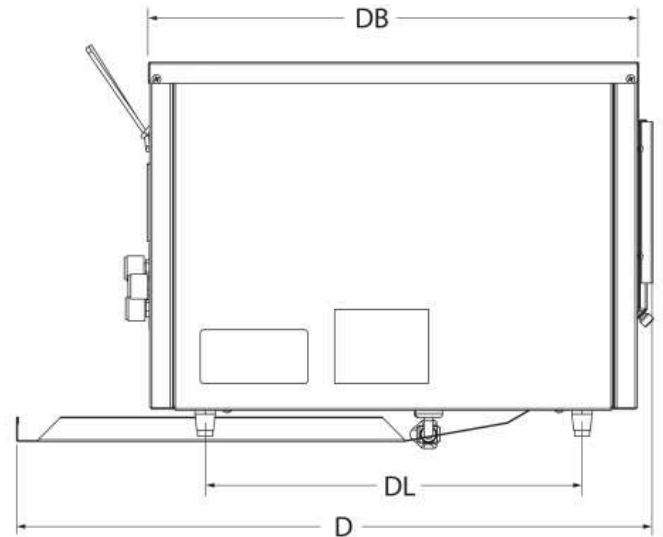

SIDE VIEW

## Model Information

Model

JT3

UPC

671080705705

## Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 14
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 35.6
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	17.3
Cord Length (IN)	54
Cord Length (CM)	140

Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	3600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102

Name	Part #
CT4 18" TOAST CHUTE	B300013
CT4 18" LOAD-UP WIRE RACK	B400382
CT4 18" CRUMB TRAY ASSEMBLY	B204278
SWITCH FAN CERAMIC	B401107
CT4 18" CONTROL LABEL	B401402
2PK HEAT ELEM 15-3/8 104V 900W	59839
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 208-volt JT2000 bread conveyor toaster

This Vollrath® JT2000 bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1¾-inch product opening is great for bread slices or bun halves, and the 14½-inch-wide conveyor can



fit up to 2,000 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control, variable top and bottom heat controls, and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

14½-inch-wide conveyor fits up to 2,000 items per hour


1¾-inch product opening easily fits products

Energy efficient, fast reacting, quartz heaters

## PRODUCT SPECIFICATIONS

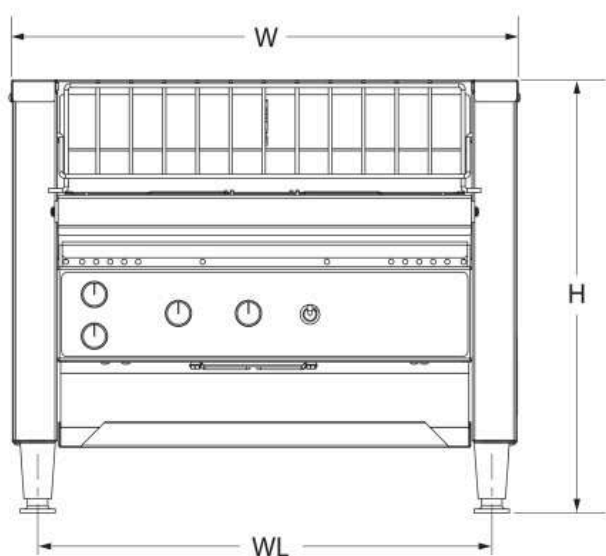

FRONT VIEW

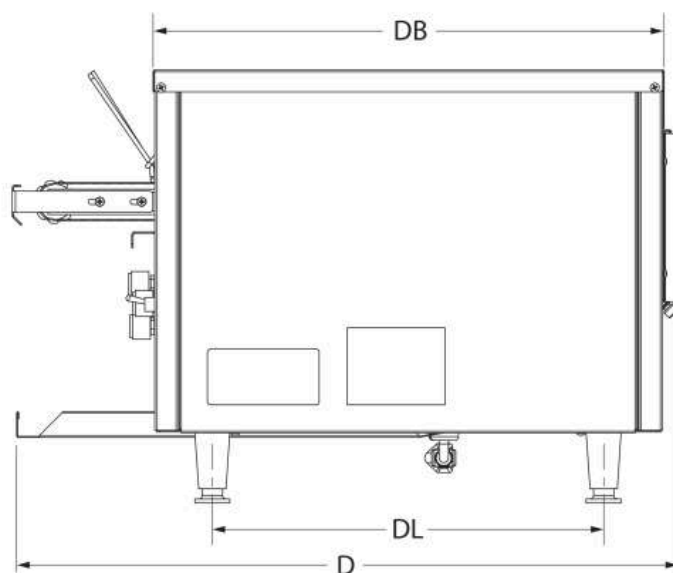

SIDE VIEW

## Model Information

Model

JT2000

UPC

671080705712

## Unit Dimensions

Overall Dimensions (IN)	14.5 x 23.625 x 13.125
(W) Width (IN)	18.06
(D) Depth (IN)	23.62
(H) Height (IN)	15.43
(WL) Width between legs	16.187
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.75
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	36.8 x 60 x 33.3
(W) Width (CM)	45.9
(D) Depth (CM)	60
(H) Height (CM)	39.3
(WL) Width between legs (CM)	41.2
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	4.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	23.1
Cord Length (IN)	54
Cord Length (CM)	140

Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	4800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
LEG 2 1/2" METAL PLATED	B400303
SILVER PUSH-ON KNOB	B405018
32-TOOTH SPROCKET	B401302
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
LABEL RESET CT4	B401425
CT4-2000 NOSE GUARD	B300807
WIRE CONVERYOR BELT 14"X40"	B204279

Name	Part #
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
SHAFT DRIVE 14.5"	B401342
11-TOOTH SPROCKET	B401301
SPRING .038" DIA 1.500" LENGTH	B400261
CT4-2000 CONTROL LABEL	B401415
CONTROL SPEED 500 OHM CT4	B200901
17.5" DRIVE CHAIN	B401381
RESET SWITCH	B401100
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CT4 18" LOAD-UP WIRE RACK	B400382
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
CT4-2000 CRUMB TRAY ASSEMBLY	B205105
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
7/8 WIRE CLAMP	B400331
2PK HEAT ELEM 15-3/8 69.3 533W	59907

**Name**

**Part #**

STRGHT 12 GA STRAIN RLF BSHNG

B400321



## 220 volt 3600 watts JT3 bread conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

220V

1000 slices/hour

14 ½" conveyor

1 ½" product opening

Suggested for high volume applications

Variable top/bottom heat control


Forced convection toasting promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters


Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power

Variable speed control to achieve desired color

PRODUCT SPECIFICATIONS

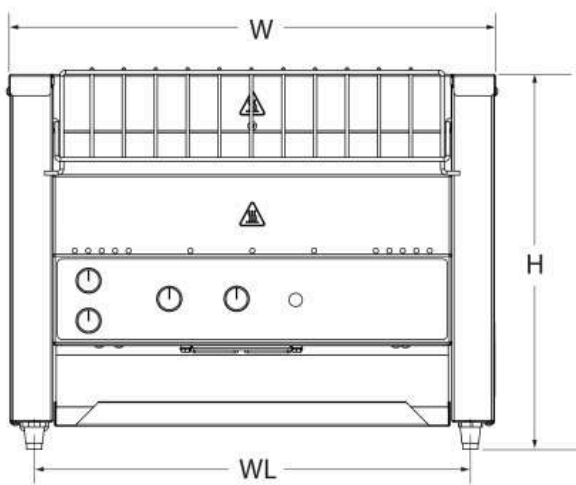

FRONT VIEW

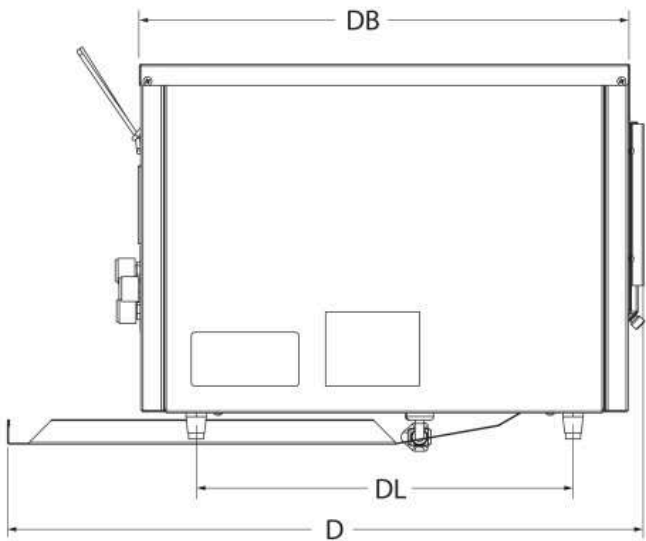

SIDE VIEW

Model Information

Model	JT3
UPC	671080705729

Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 14
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	14

(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 35.6
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

**Electrical**

Amps	16.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	3600

**Construction**



Countertop or Drop-In

Countertop

Food Type

Standard Breads

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
LABEL RESET CT4	B401425
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
CT4 18" LOAD-UP WIRE RACK	B400382
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350

Name	Part #
2PK HEAT ELEM 15-3/8 110V 900W	59840
CT4 18" CONTROL LABEL	B401402
MOTOR FAN	B401211
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 220-volt JT2000 bread conveyor toaster

This JT2000 bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The standard 1 ¾-inch product opening is great for bread slices or bun halves, and the 14 ½-inch-wide conveyor

can fit up to 2000 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices and bun halves

Variable-speed control, variable top and bottom heat controls, and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


Standby mode reduces energy use up to 75 percent

14 ½-inch-wide conveyor fits up to 2000 items per hour


1 ¾-inch product opening easily fits products

Energy-efficient, fast-reacting, quartz heaters

## PRODUCT SPECIFICATIONS

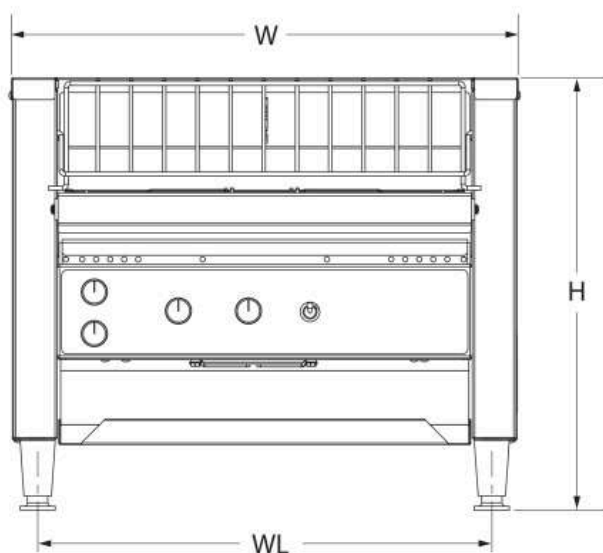

FRONT VIEW

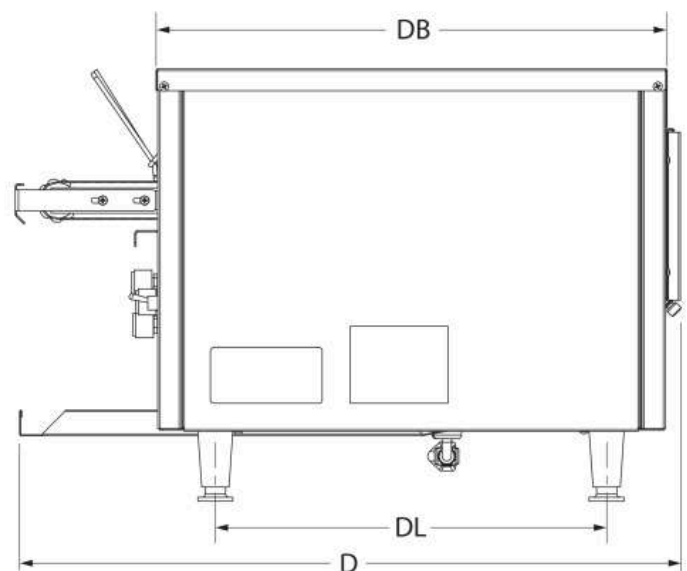

SIDE VIEW

---

## Model Information

Model	JT2000
UPC	671080705736

**Unit Dimensions**

Overall Dimensions (IN)	14.5 x 23.625 x 13.125
(W) Width (IN)	18.06
(D) Depth (IN)	23.62
(H) Height (IN)	15.43
(WL) Width between legs	16.187
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.75
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	36.8 x 60 x 33.3
(W) Width (CM)	45.9
(D) Depth (CM)	60
(H) Height (CM)	39.3
(WL) Width between legs (CM)	41.2
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	4.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

**Electrical**

Amps	21.8
Cord Length (IN)	54

Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	4800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
LABEL RESET CT4	B401425
CT4-2000 NOSE GUARD	B300807
TERMINAL BLOCK 5 POSITION	B401033
LEG 2 1/2" METAL PLATED	B400303
SILVER PUSH-ON KNOB	B405018
32-TOOTH SPROCKET	B401302
GUARD FAN	B401220
SWITCH 240 V	B401102

Name	Part #
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116
CT4 18" LOAD-UP WIRE RACK	B400382
SHAFT DRIVE 14.5"	B401342
11-TOOTH SPROCKET	B401301
SPRING .038" DIA 1.500" LENGTH	B400261
CT4-2000 CONTROL LABEL	B401415
CONTROL SPEED 500 OHM CT4	B200901
17.5" DRIVE CHAIN	B401381
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
BEARING ASSEMBLY 5/16	B201100
MOTOR FAN	B401211
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
CT4-2000 CRUMB TRAY ASSEMBLY	B205105
RESET SWITCH	B401100
2PK HEAT ELEM15-3/8 73.3V 533W	59941
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
WIRE CONVERYOR BELT 14"X40"	B204279
STRGHT 12 GA STRAIN RLF BSHNG	B400321

Name	Part #
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034





## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

14-1/2” (36.8 cm) 3-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT3
UPC	671080844343

**Unit Dimensions**

Overall Dimensions (IN)	18.062 x 23.75 x 14
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 35.6
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6

(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	14.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	Stripped ends
Domestic / International	International
Voltage	220-240
Watts	3600

## Construction

Construction Material	Stainless Steel
Countertop or Drop-In	Countertop
Food Type	Standard Breads

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019

Name	Part #
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
LABEL RESET CT4	B401425
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
2PK HEAT ELEM 15-3/8 120V 900W	59841
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CT4 18" LOAD-UP WIRE RACK	B400382
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CT4 18" CONTROL LABEL	B401402

Name	Part #
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
7/8 WIRE CLAMP	B400331



## 240 volt 4800 watts JT2000 bread conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

240V

2000 slices/hour

14 ½" conveyor

Suggested for high volume applications

1 ¾" product opening

Bread/Bagel mode toggle to quickly switch between one-sided and two-sided toasting



Extended load area keeps user’s hands farther from heat source.

Forced convection toasting promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power

PRODUCT **SPECIFICATIONS**

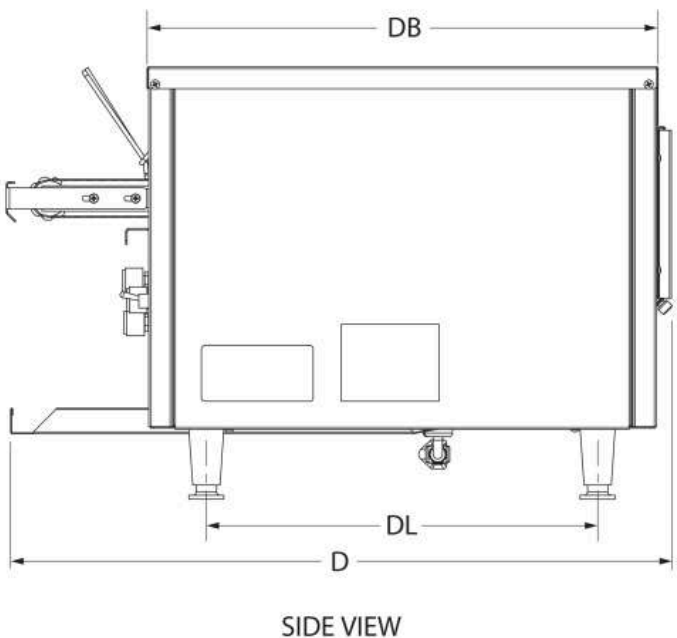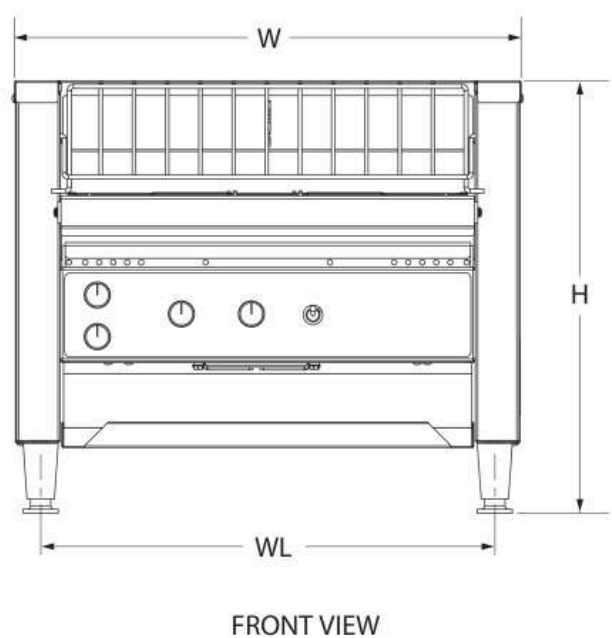

**Model Information**

Model	JT2000
UPC	671080705750

**Unit Dimensions**

Overall Dimensions (IN)	14.5 x 23.625 x 13.125
(W) Width (IN)	18.06
(D) Depth (IN)	23.62

(H) Height (IN)	15.43
(WL) Width between legs	16.187
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.75
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	36.8 x 60 x 33.3
(W) Width (CM)	45.9
(D) Depth (CM)	60
(H) Height (CM)	39.3
(WL) Width between legs (CM)	41.2
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	4.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

### Electrical

Amps	20
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	4800

### Construction



Countertop or Drop-In	Countertop
Food Type	Standard Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
LABEL RESET CT4	B401425
CT4-2000 NOSE GUARD	B300807
32-TOOTH SPROCKET	B401302
LEG 2 1/2" METAL PLATED	B400303
SILVER PUSH-ON KNOB	B405018
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116
CT4 18" LOAD-UP WIRE RACK	B400382
CORD POWER 12/3 60" 6-30P	B401051
CT4 SIDE PANEL	B300037
SHAFT DRIVE 14.5"	B401342

Name	Part #
2PK HEAT ELEM 15-3/8 80V 533W	59908
11-TOOTH SPROCKET	B401301
SPRING .038" DIA 1.500" LENGTH	B400261
CT4-2000 CONTROL LABEL	B401415
CONTROL SPEED 500 OHM CT4	B200901
17.5" DRIVE CHAIN	B401381
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
WIRE CONVERYOR BELT 14"X40"	B204279
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
CT4-2000 CRUMB TRAY ASSEMBLY	B205105
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
STRGHT 12 GA STRAIN RLF BSHNG	B400321
7/8 WIRE CLAMP	B400331



## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

10-1/2” (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT2
UPC	671080844350

**Unit Dimensions**

Overall Dimensions (IN)	14.125 x 23.75 x 14
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6

(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

### Electrical

Amps	11.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	EU
Domestic / International	Europe
Voltage	220-240
Watts	2800

### Construction

Construction Material	Stainless Steel
Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300

Name	Part #
2PK HEAT ELEM 11-3/8 120V 700W	59854
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
TERMINAL BLOCK 5 POSITION	B401033
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CT4 SIDE PANEL	B300037
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
BELT WIRE CONVEYOR 10.5"X30"	B204273
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
SWITCH FAN CERAMIC	B401107
SHAFT IDLER 10.5"	B401341
CHAIN LADDER DRIVE 15"	B401388
CT4 TOAST CHUTE	B300012
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100

Name	Part #
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
LEGS BLACK 1" 1/4-20	B400300
MOTOR FAN	B401211



## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.



Stainless steel and aluminized steel construction.

10-1/2” (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT2
UPC	671080844367

**Unit Dimensions**

Overall Dimensions (IN)	14.125 x 23.75 x 14
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	14
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 35.6
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	35.6

(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

### Electrical

Amps	11.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	UK
Domestic / International	United Kingdom
Voltage	220-240
Watts	2800

### Construction

Construction Material	Stainless Steel
Countertop or Drop-In	Countertop
Food Type	Standard Breads

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401

Name	Part #
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
2PK HEAT ELEM 11-3/8 120V 700W	59854
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 SIDE PANEL	B300037
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
SHAFT IDLER 10.5"	B401341
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
CT4 TOAST CHUTE	B300012
CORD UK 13 AMP FUSE	B401054
CONTROL SPEED 500 OHM CT4	B200901
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
MOTOR FAN	B401211
BEARING FRONT SPRING LOADED	B401350

Name	Part #
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332



## 240-volt JT2B bun and bagel conveyor toaster

This JT2B bun and bagel conveyor toaster by Vollrath is consistent, reliable and energy-efficient, making it the perfect choice for one-sided bun or bagel toasting. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 2-inch product opening is great for bun and

bagel halves, and the 10 ½-inch-wide conveyor can fit up to 1200 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

- Designed for one-sided toasting of bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Heavy-duty metal-sheathed heating elements work to toast buns and bagel halves properly
- Durable stainless and aluminized steel is built to last

Standby mode reduces energy use up to 75 percent

Maintenance-free drive system simplifies operation and servicing

10 ½-inch-wide conveyor fits up to 1200 items per hour

2-inch product opening easily fits products

PRODUCT SPECIFICATIONS

Model Information

Model	JT2B
UPC	671080705798

Unit Dimensions

Overall Dimensions (IN)	14.625 x 23.875 x 16.125
(W) Width (IN)	14.62
(D) Depth (IN)	23.87
(H) Height (IN)	16.12
(WL) Width between legs	12.625
(DL) Depth between legs	14.5
Product Opening Dimensions (IN)	2.25

Conveyor Width (IN)	10.5
Overall Dimensions (CM)	37.1 x 66.6 x 41
(W) Width (CM)	37.1
(D) Depth (CM)	66.6
(H) Height (CM)	41
(WL) Width between legs (CM)	32.1
(DL) Depth between legs (CM)	36.8
Product Opening Dimensions (CM)	5.7
Conveyor Width (CM)	26.7

### Electrical

Amps	13.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	240
Watts	3200

### Construction

Countertop or Drop-In	Countertop
Food Type	Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CT4B SIDE PANNEL	B300206
CORD POWER 12/3 6-20P	B401053
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
WIRE CONVEYOR BELT 10.5" X 33"	B205118
METAL ELEMENT 120V 200W	B403005
CT4B CONTROL LABEL	B401412
CONTROL SPEED 1000 OH CT4	B200911
32-TOOTH SPROCKET	B401302
SHAFT IDLER 10.5"	B401341
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
LOAD-UP RACK WIRE CT4	B400381
CT4 TOAST CHUTE	B300012
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
METAL ELEMENT 240V 1400W	B403003
MOTOR FAN	B401211



Name	Part #
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CHAIN DRIVE LADDER 19"	B401384
LEGS BLACK 1" 1/4-20	B400300
CORD WARNING LABEL	B401404
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
1 1/4" SNAP BUSHING	B400330



## 208-volt JT3BH bun or bagel conveyor toaster

This Vollrath® JT3BH bun or bagel conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,

bagels and more. The 14½-inch-wide conveyor can fit up to 1,400 bun halves or 950 bread slices per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves and bagel halves

Variable-speed control, variable top and bottom heat controls, and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


14½-inch-wide conveyor fits up to 1,400 items per hour

1½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT SPECIFICATIONS

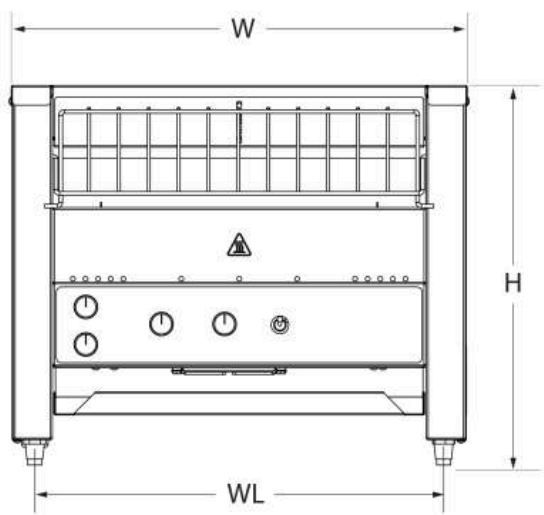

FRONT VIEW

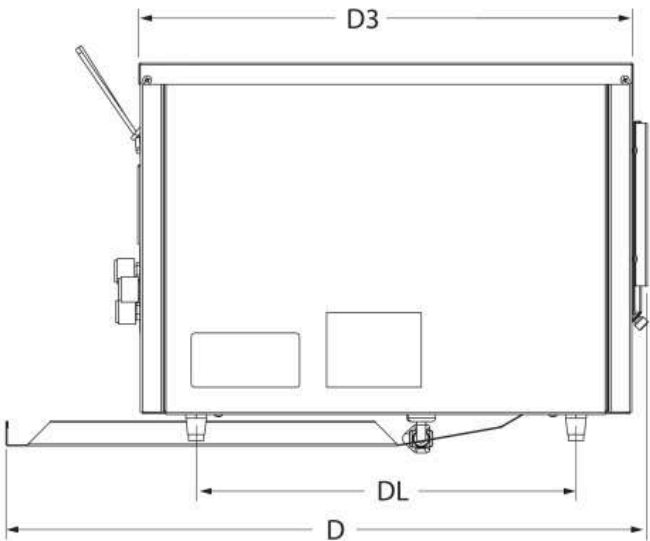

SIDE VIEW

Model Information

Model

JT3BH

UPC

671080705804

## Unit Dimensions

Overall Dimensions (IN)	18.125 x 23.875 x 15
(W) Width (IN)	18.12
(D) Depth (IN)	23.87
(H) Height (IN)	15
(WL) Width between legs	16.25
(DL) Depth between legs	14.125
Product Opening Dimensions (IN)	1.5 - 3
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	46.0 x 66.6 x 38.1
(W) Width (CM)	46
(D) Depth (CM)	66.6
(H) Height (CM)	38.1
(WL) Width between legs (CM)	41.3
(DL) Depth between legs (CM)	35.9
Product Opening Dimensions (CM)	3.8 - 7.6
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	17.3
Cord Length (IN)	54
Cord Length (CM)	140

Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	3600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116

Name	Part #
CT4 18" LOAD-UP WIRE RACK	B400382
SHAFT DRIVE 14.5"	B401342
CT4-2000 CONTROL LABEL	B401415
CONTROL SPEED 500 OHM CT4	B200901
MOTOR DRIVE 208/240V RMS 344	B401201
SWITCH FAN CERAMIC	B401107
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
2PK HEAT ELEM 15-3/8 104V 900W	59839
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
MOTOR FAN	B401211
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
CORD POWER 12/3 60" 6-30P	B401051
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 220-volt JT3BH bun or bagel conveyor toaster

This JT3BH bun or bagel conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,

bagels and more. The 14 ½-inch-wide conveyor can fit up to 1400 bun halves or 950 bread slices per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

- Designed for bread slices, bun and bagel halves

Variable-speed control, variable top and bottom heat controls, and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy
- Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent

14 ½-inch-wide conveyor fits up to 1400 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT3BH
UPC	671080705811

**Unit Dimensions**

Overall Dimensions (IN)	18.125 x 23.875 x 15
(W) Width (IN)	18.12
(D) Depth (IN)	23.87
(H) Height (IN)	15
(WL) Width between legs	16.25
(DL) Depth between legs	14.125



Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	46.0 x 66.6 x 38.1
(W) Width (CM)	46
(D) Depth (CM)	66.6
(H) Height (CM)	38.1
(WL) Width between legs (CM)	41.3
(DL) Depth between legs (CM)	35.9
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	16.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
2PK HEAT ELEM 15-3/8 110V 900W	59840
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
CT4-2000 CONTROL LABEL	B401415
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CT4 18" LOAD-UP WIRE RACK	B400382
CT4 18" CRUMB TRAY ASSEMBLY	B204278

Name	Part #
BEARING ASSEMBLY 5/16	B201100
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
LABEL RESET CT4	B401425
MOTOR FAN	B401211
CORD WARNING LABEL	B401404
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332



## 240-volt JT3BH bun or bagel conveyor toaster

This JT3BH bun or bagel conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,

bagels and more. The 14 ½-inch-wide conveyor can fit up to 1400 bun halves or 950 bread slices per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

- Designed for bread slices, bun and bagel halves

Variable-speed control, variable top and bottom heat controls, and one- or two-sided toasting switch help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy
- Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent

14 ½-inch-wide conveyor fits up to 1400 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT3BH
UPC	671080705828

**Unit Dimensions**

Overall Dimensions (IN)	18.125 x 23.875 x 15
(W) Width (IN)	18.12
(D) Depth (IN)	23.87
(H) Height (IN)	15
(WL) Width between legs	16.25
(DL) Depth between legs	14.125

Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	46.0 x 66.6 x 38.1
(W) Width (CM)	46
(D) Depth (CM)	66.6
(H) Height (CM)	38.1
(WL) Width between legs (CM)	41.3
(DL) Depth between legs (CM)	35.9
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	15
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
LABEL RESET CT4	B401425
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
SWITCH TOGGLE ON/ON 15A	B401116
2PK HEAT ELEM 15-3/8 120V 900W	59841
CT4 18" LOAD-UP WIRE RACK	B400382
CT4 18" CRUMB TRAY ASSEMBLY	B204278
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CHAIN LADDER DRIVE 15"	B401388
SHAFT DRIVE 14.5"	B401342
CT4-2000 CONTROL LABEL	B401415

Name	Part #
CONTROL SPEED 500 OHM CT4	B200901
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
LEGS BLACK 1" 1/4-20	B400300
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
MOTOR FAN	B401211
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
STRGHT 12 GA STRAIN RLF BSHNG	B400321





## 120-volt JT2H bread conveyor toaster

This Vollrath® JT2H bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more.

The 10½-inch-wide conveyor can fit up to 300 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 300 items per hour

3-inch product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

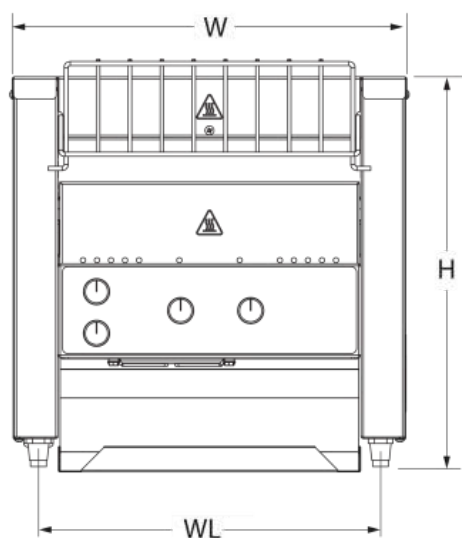

FRONT VIEW

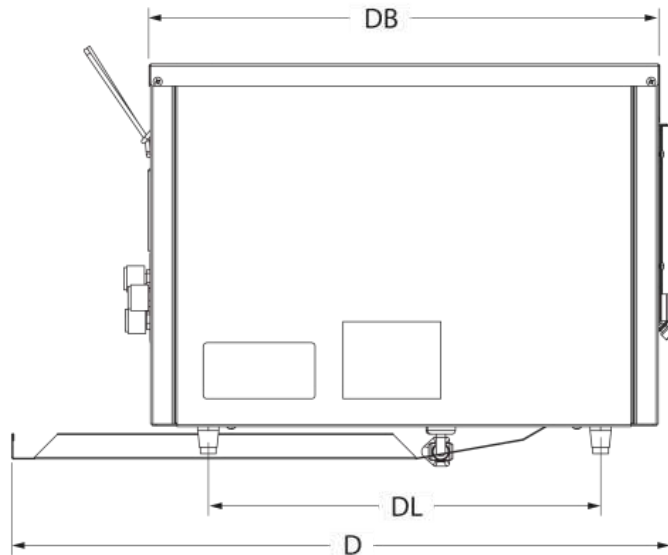

SIDE VIEW

## Model Information

Model

JT2H

UPC

671080683379

## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	14.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P

Voltage	120
Watts	1700

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CONTROL SPEED 250 OHM CT4	B200900
SWITCH 120 V	B401101
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
SHAFT IDLER 10.5"	B401341
14 Ga Straight Strain Relief	B400320
MOTOR DRIVE 120V RMS 345	B401200
CT4 TOAST CHUTE	B300012
TERMINAL BLOCK 5 POSITION	B401033

Name	Part #
GUARD FAN	B401220
LOAD-UP RACK WIRE CT4	B400381
CORD POWER 14/3 60" 5-15 PLUG	B401052
MOTOR FAN	B401209
CHAIN LADDER DRIVE 15"	B401388
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
BEARING, TEFLON 5/16	B401355
LEGS BLACK 1" 1/4-20	B400300
CT4H HEAT SHUTTER	B300058
CORD WARNING LABEL	B401404
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
7/8 WIRE CLAMP	B400331
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332



## 208-volt JT2H bread conveyor toaster

This Vollrath® JT2H bread conveyor toaster is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more.

The 10½-inch-wide conveyor can fit up to 550 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun halves and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy


Durable stainless and aluminized steel is built to last

Maintenance-free drive system simplifies operation and servicing


10½-inch-wide conveyor fits up to 550 items per hour

3-inch product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

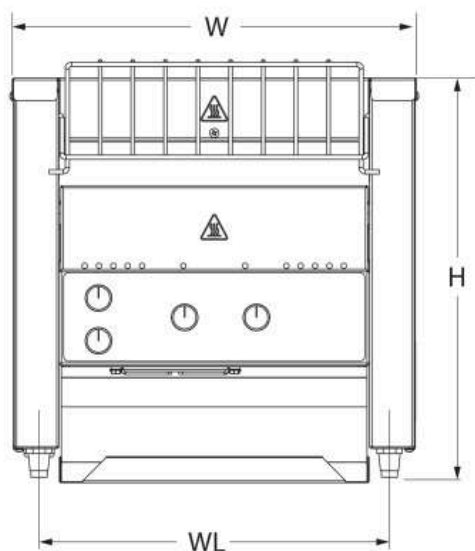

FRONT VIEW

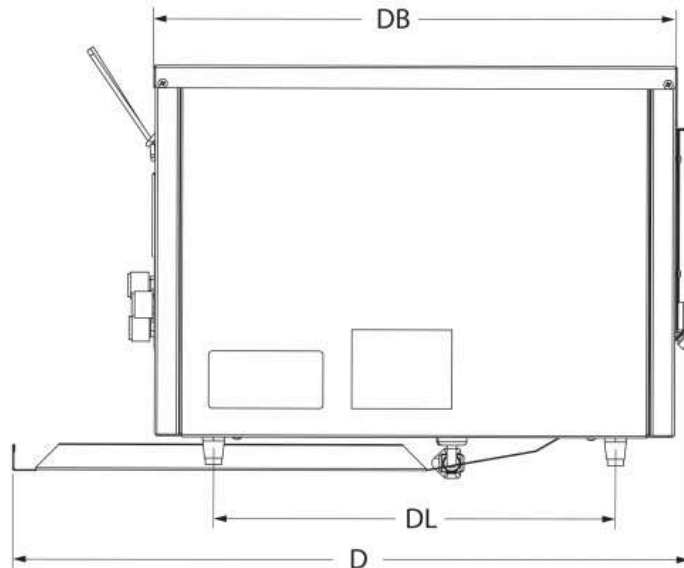

SIDE VIEW

## Model Information

Model

JT2H

UPC

671080683386

## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	13.5
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P



Voltage	208
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
2PK HEAT ELEM11-3/8 104V 700W	59836
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
TERMINAL BLOCK 5 POSITION	B401033
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
CORD POWER 14/3 60" 6-20 PLUG	B401050
GUARD FAN	B401220

Name	Part #
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
CT4 TOAST CHUTE	B300012
BELT WIRE CONVEYOR 10.5"X30"	B204273
BEARING ASSEMBLY 5/16	B201100
SHAFT IDLER 10.5"	B401341
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
MOTOR FAN	B401211
CT4H HEAT SHUTTER	B300058
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 220-volt JT2H high-clearance bread conveyor toaster

This JT2H bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more.

The 10 ½-inch-wide conveyor can fit up to 550 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


10 ½-inch-wide conveyor fits up to 550 items per hour

3-inch product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

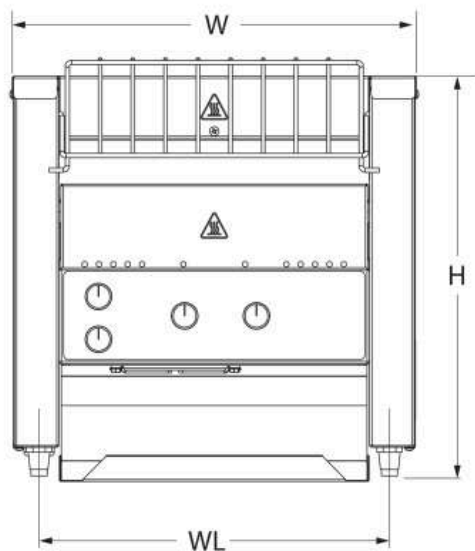

FRONT VIEW

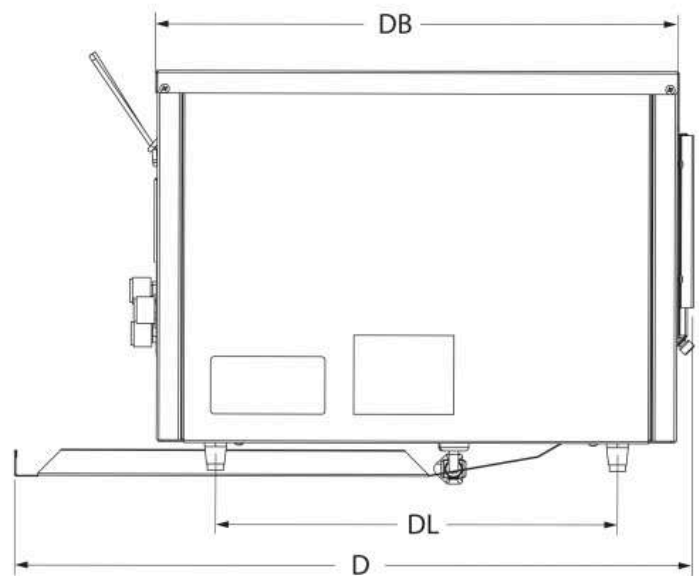

SIDE VIEW

## Model Information

Model

JT2H

UPC

671080683393

## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	12.7
Cord Length (IN)	54
Cord Length (CM)	140

Hz	60
Plug	NEMA 6-20P
Voltage	220
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 TOAST CHUTE	B300012
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260

Name	Part #
SHAFT IDLER 10.5"	B401341
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
CORD POWER 14/3 60" 6-20 PLUG	B401050
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
2PK HEAT ELEM 11-3/8 110V 700W	59838
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
RESET SWITCH	B401100
CT4H HEAT SHUTTER	B300058
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
5/8 SNAP BUSHING	B400332
BELT WIRE CONVEYOR 10.5"X30"	B204273
MOTOR FAN	B401211



## 220-volt JT3H high-clearance bread conveyor toaster

This JT3H bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,



bagels and more. The 14 ½-inch-wide conveyor can fit up to 950 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


14 ½-inch-wide conveyor fits up to 950 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

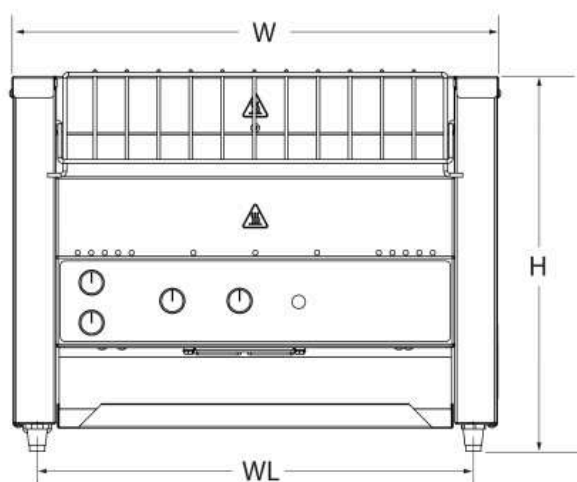

FRONT VIEW

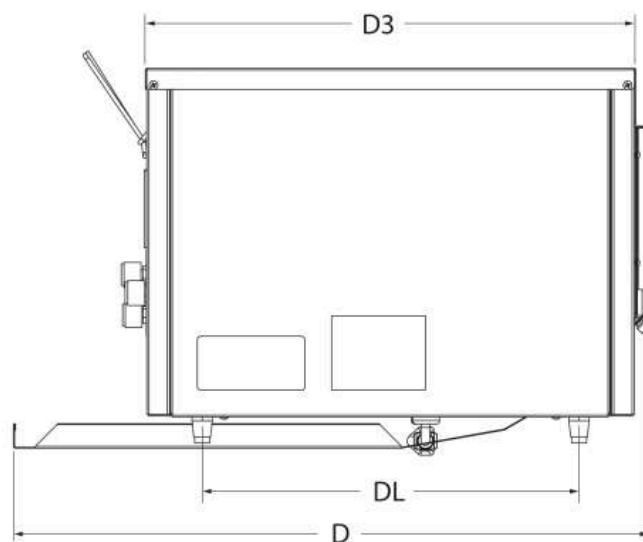

SIDE VIEW

## Model Information

Model

JT3H

UPC

671080705842

## Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 15
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	15
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 38
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	38
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	16.4
------	------

Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	3600

**Construction**

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

**Case Lot Measurement**

PRODUCT **PARTS**

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SWITCH FAN CERAMIC	B401107
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CORD POWER 12/3 60" 6-30P	B401051
2PK HEAT ELEM 15-3/8 110V 900W	59840
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220

Name	Part #
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
CT4 18" LOAD-UP WIRE RACK	B400382
MOTOR DRIVE 208/240V RMS 344	B401201
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
CHAIN LADDER DRIVE 15"	B401388
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LABEL RESET CT4	B401425
CT4 18" CONTROL LABEL	B401402
MOTOR FAN	B401211
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CORD WARNING LABEL	B401404
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
RESET SWITCH	B401100
TERMINAL BLOCK 2 POSITION	B401034



## Conveyor toaster

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

14-1/2” (36.8 cm) 3-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

P-EAN 13	8421661423953
Model	JT3H
UPC	671080844398

**Unit Dimensions**

Overall Dimensions (IN)	18.062 x 23.75 x 15
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	15
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 38
(W) Width (CM)	45.9
(D) Depth (CM)	60.3

(H) Height (CM)	38
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	14.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	Stripped ends
Domestic / International	International
Voltage	220-240
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement



## 240-volt JT2H high-clearance bread conveyor toaster

This JT2H bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more.



The 10 ½-inch-wide conveyor can fit up to 550 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


10 ½-inch-wide conveyor fits up to 550 items per hour

3-inch product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

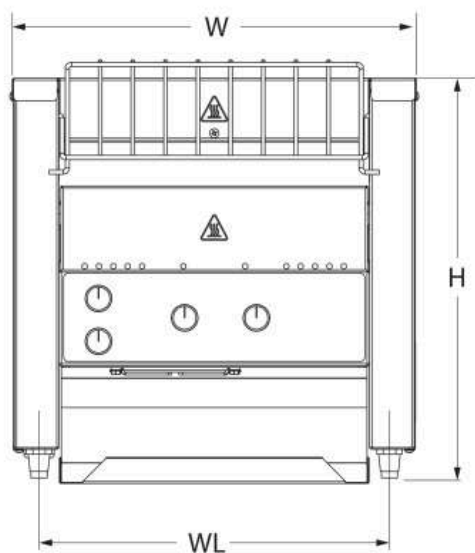

FRONT VIEW

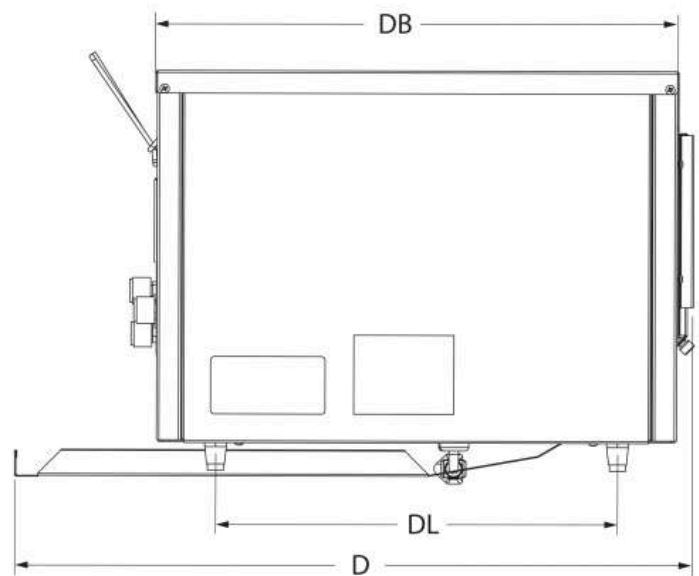

SIDE VIEW

## Model Information

Model

JT2H

UPC

671080683409

## Unit Dimensions

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4
(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

## Electrical

Amps	11.7
Cord Length (IN)	54
Cord Length (CM)	140

Hz	60
Plug	NEMA 6-20P
Voltage	240
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
2PK HEAT ELEM 11-3/8 120V 700W	59854
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CT4 TOAST CHUTE	B300012
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220

Name	Part #
SWITCH 240 V	B401102
SHAFT DRIVE 10.5"	B401340
SHAFT IDLER 10.5"	B401341
CHAIN LADDER DRIVE 15"	B401388
CORD POWER 14/3 60" 6-20 PLUG	B401050
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
LOAD-UP RACK WIRE CT4	B400381
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LEGS BLACK 1" 1/4-20	B400300
CT4H HEAT SHUTTER	B300058
CORD WARNING LABEL	B401404
TERMINAL BLOCK 2 POSITION	B401034
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
RESET SWITCH	B401100
MOTOR FAN	B401211
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332



## 240-volt JT3H high-clearance bread conveyor toaster

This JT3H bread conveyor toaster by Vollrath is consistent, reliable and energy-efficient. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns,

bagels and more. The 14 ½-inch-wide conveyor can fit up to 950 items per hour. The durable stainless and aluminized steel exterior is built to last, and heavy-duty legs allow leveling adjustments to provide maximum stability on any countertop.

Designed for bread slices, bun and bagel halves

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Durable stainless and aluminized steel is built to last


Maintenance-free drive system simplifies operation and servicing

Standby mode reduces energy use up to 75 percent


14 ½-inch-wide conveyor fits up to 950 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

## PRODUCT SPECIFICATIONS

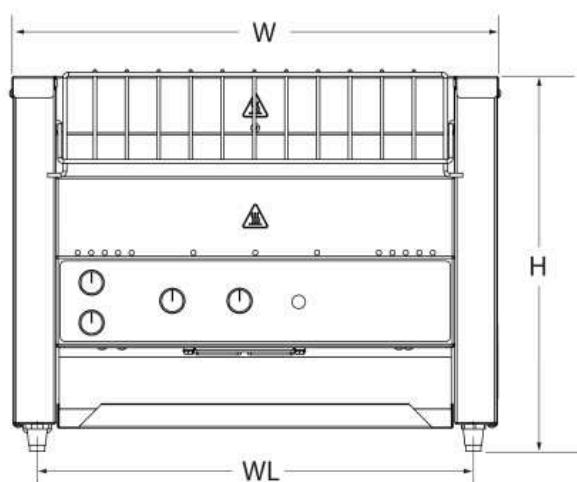

FRONT VIEW

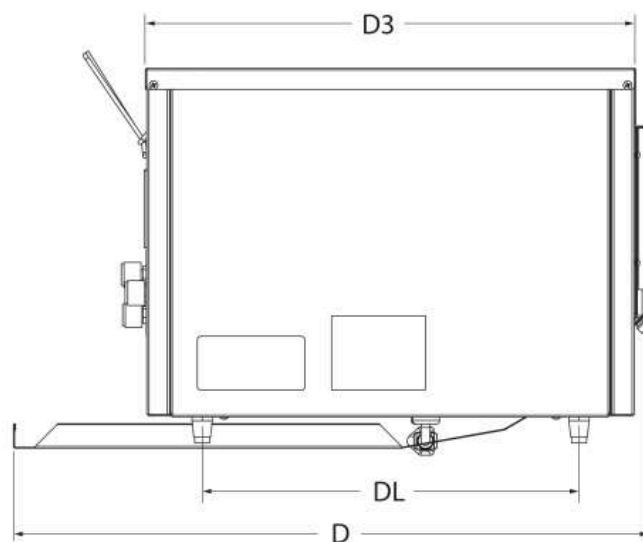

SIDE VIEW

## Model Information

Model

JT3H

UPC

671080705859

## Unit Dimensions

Overall Dimensions (IN)	18.062 x 23.75 x 15
(W) Width (IN)	18.06
(D) Depth (IN)	23.75
(H) Height (IN)	15
(WL) Width between legs	16.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(D3) Housing Depth (IN)	18.25
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	45.9 x 60.3 x 38
(W) Width (CM)	45.9
(D) Depth (CM)	60.3
(H) Height (CM)	38
(WL) Width between legs (CM)	41.1
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(D3) Housing Depth (CM)	46.4
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	36.8

## Electrical

Amps	15
------	----

Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	3600

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### Case Lot Measurement

### PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CORD POWER 12/3 60" 6-30P	B401051
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102



Name	Part #
CT4 18" TOAST CHUTE	B300013
2PK HEAT ELEM 15-3/8 120V 900W	59841
CT4 18" LOAD-UP WIRE RACK	B400382
MOTOR DRIVE 208/240V RMS 344	B401201
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
CHAIN LADDER DRIVE 15"	B401388
SWITCH FAN CERAMIC	B401107
CT4 18" CONTROL LABEL	B401402
MOTOR FAN	B401211
SHAFT DRIVE 14.5"	B401342
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
5/8 SNAP BUSHING	B400332
LEGS BLACK 1" 1/4-20	B400300
TERMINAL BLOCK 2 POSITION	B401034



# International Conveyor Toasters

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

10-1/2” (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT2H
-------	------

**Unit Dimensions**

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4
(WL) Width between legs (CM)	31

(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

### Electrical

Amps	11.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	Schuko
Domestic / International	Europe
Voltage	220 - 240
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
2PK HEAT ELEM 11-3/8 120V 700W	59854

Name	Part #
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
TERMINAL BLOCK 5 POSITION	B401033
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
BELT WIRE CONVEYOR 10.5"X30"	B204273
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 TOAST CHUTE	B300012
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
SWITCH FAN CERAMIC	B401107
SHAFT IDLER 10.5"	B401341
CHAIN LADDER DRIVE 15"	B401388
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
LEGS BLACK 1" 1/4-20	B400300
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CT4H HEAT SHUTTER	B300058

Name	Part #
CORD WARNING LABEL	B401404
1 1/4" SNAP BUSHING	B400330
5/8 SNAP BUSHING	B400332
MOTOR FAN	B401211



DISCONTINUED

## International Conveyor Toasters

Vollrath Conveyor Toasters feature industry-leading design technology and are made in the USA. Forced convection and energy-efficient quartz heaters provide consistent toasting of bread products.

Forced convection toasting promotes uniform results and energy efficiency.

Energy efficient, fast reacting, quartz heaters.

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power.

Variable speed control to achieve desired color.

Stainless steel and aluminized steel construction.

10-1/2” (26.7 cm) 2-slice wide conveyor is larger than industry standard for better toasting results.

High-temperature bearings ensure smooth operation and do not require lubrication.

High-quality, insulated wires help prevent against dry rotting and cracking.

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT2H
-------	------

**Unit Dimensions**

Overall Dimensions (IN)	14.125 x 23.75 x 15.125
(W) Width (IN)	14.12
(D) Depth (IN)	23.75
(H) Height (IN)	15.12
(WL) Width between legs	12.187
(DL) Depth between legs	14.062
Product Opening Dimensions (IN)	1.5 - 3
(DB) Depth of Body (IN)	18.25
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	35.9 x 60.3 x 38.4
(W) Width (CM)	35.9
(D) Depth (CM)	60.3
(H) Height (CM)	38.4



(WL) Width between legs (CM)	31
(DL) Depth between legs (CM)	35.7
Product Opening Dimensions (CM)	3.8 - 7.6
(DB) Depth of Body (CM)	46.4
Conveyor Width (CM)	26.7

### Electrical

Amps	11.2
Cord Length (IN)	54
Cord Length (CM)	140
Hz	50/60
Plug	UK
Domestic / International	United Kingdom
Voltage	220 - 240
Watts	2800

### Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

### PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300

Name	Part #
2PK HEAT ELEM 11-3/8 120V 700W	59854
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 TOAST CHUTE	B300012
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
SHAFT IDLER 10.5"	B401341
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
LOAD-UP RACK WIRE CT4	B400381
CORD UK 13 AMP FUSE	B401054
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
MOTOR FAN	B401211
RESET SWITCH	B401100
CT4H HEAT SHUTTER	B300058
CORD WARNING LABEL	B401404

Name	Part #
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CHAIN LADDER DRIVE 15"	B401388
LEGS BLACK 1" 1/4-20	B400300
5/8 SNAP BUSHING	B400332



## 208-volt JT4HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 1100 items per hour, and the convertible design helps you save space without sacrificing quality.

- Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting
- Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 1100 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT SPECIFICATIONS

Model Information

Model	JT4HC
UPC	671080720449

Unit Dimensions

Overall Dimensions (IN)	21.25 x 46.187 x 23.5
(W) Width (IN)	46.18
(W2) Secondary Width (IN)	29.375
(D) Depth (IN)	21.25
(H) Height (IN)	23.5

(WL) Width between legs	17.375
(DL) Depth between legs	25.5
Product Opening Dimensions (IN)	1.5 - 3
Overall Dimensions (CM)	53.8 x 117.3 x 59.7
(W) Width (CM)	117.3
(W2) Secondary Width (CM)	74.6
(D) Depth (CM)	53.8
(H) Height (CM)	59.7
(WL) Width between legs (CM)	44.1
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6

## Electrical

Amps	23.6
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	4950

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SHAFT IDLER	B401349
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
CT4-DUAL SIDE PANEL	B300230
CT4-2000 NOSE GUARD	B300807
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
SWITCH FAN CERAMIC	B401107
MOTOR DRIVE 208/240V REVERSED	B401203
LOWER CHAMBER LABEL	B401424
CORD POWER 12/3 60" 6-30P	B401051
UPPER CHAMBER LABEL	B401423
2PK HEAT ELEM15-3/8 69.3V 413W	59851
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
CONTROL SPEED 500 OHM CT4	B200901
SO2 14.5" CRUMB TRAY ASSM	B205129

Name	Part #
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
CHAIN LADDER 13.25."	B401386
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211





## 220-volt JT4HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 1100 items per hour, and the convertible design helps you save space without sacrificing quality.

- Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting
- Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 1100 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT4HC
UPC	671080720456

**Unit Dimensions**

Overall Dimensions (IN)	21.25 x 46.187 x 23.5
(W) Width (IN)	46.18
(W2) Secondary Width (IN)	29.375
(D) Depth (IN)	21.25
(H) Height (IN)	23.5

(WL) Width between legs	17.375
(DL) Depth between legs	25.5
Product Opening Dimensions (IN)	1.5 - 3
Overall Dimensions (CM)	53.8 x 117.3 x 59.7
(W) Width (CM)	117.3
(W2) Secondary Width (CM)	74.6
(D) Depth (CM)	53.8
(H) Height (CM)	59.7
(WL) Width between legs (CM)	44.1
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6

## Electrical

Amps	22.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	4950

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CT4-2000 NOSE GUARD	B300807
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
2PK HEAT ELEM11-3/8 73.3V 413W	59888
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
MOTOR DRIVE 208/240V REVERSED	B401203
LOWER CHAMBER LABEL	B401424
SO2 14.5" CRUMB TRAY ASSM	B205129
CT4-DUAL SIDE PANEL	B300230
UPPER CHAMBER LABEL	B401423
LEGS BLACK 1" 1/4-20	B400300
CT4 18" TOAST CHUTE	B300013

Name	Part #
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
CHAIN LADDER 13.25."	B401386
CONTROL SPEED 500 OHM CT4	B200901
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330



## 240-volt JT4HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 1100 items per hour, and the convertible design helps you save space without sacrificing quality.

- Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting
- Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 1100 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items

PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT4HC
UPC	671080720463

**Unit Dimensions**

Overall Dimensions (IN)	21.25 x 46.187 x 23.5
(W) Width (IN)	46.18
(W2) Secondary Width (IN)	29.375
(D) Depth (IN)	21.25
(H) Height (IN)	23.5

(WL) Width between legs	17.375
(DL) Depth between legs	25.5
Product Opening Dimensions (IN)	1.5 - 3
Overall Dimensions (CM)	53.8 x 117.3 x 59.7
(W) Width (CM)	117.3
(W2) Secondary Width (CM)	74.6
(D) Depth (CM)	53.8
(H) Height (CM)	59.7
(WL) Width between legs (CM)	44.1
(DL) Depth between legs (CM)	39.4
Product Opening Dimensions (CM)	3.8 - 7.6

## Electrical

Amps	20.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	4950

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement



## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
SHAFT IDLER	B401349
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
CHAIN LADDER 26"	B401387
CT4-DUAL SIDE PANEL	B300230
SWITCH 240 V	B401102
FRONT BEARING SPRING-LOADED	B401352
CT4 18" TOAST CHUTE	B300013
CT4-2000 NOSE GUARD	B300807
MOTOR DRIVE 208/240V REVERSED	B401203
2PK HEAT ELEM 15-3/8 80V 413W	59852
CORD POWER 12/3 60" 6-30P	B401051
SHAFT DRIVE 14.5"	B401342
SPRING .038" DIA 1.500" LENGTH	B400261
SO2 14.5" CRUMB TRAY ASSM	B205129
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
LOWER CHAMBER LABEL	B401424

Name	Part #
WIRE CONVEYOR BELT 14.5" X 42"	B205138
MOTOR FAN	B401211
UPPER CHAMBER LABEL	B401423
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
CONTROL SPEED 500 OHM CT4	B200901
RESET SWITCH	B401100
CORD WARNING LABEL	B401404
CHAIN LADDER 13.25."	B401386
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
7/8 WIRE CLAMP	B400331



## 120-volt JT2HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 300 items per hour, and the convertible design helps you save space without sacrificing quality.

Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 300 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items



PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT2HC
UPC	671080705866

**Unit Dimensions**

Overall Dimensions (IN)	15.875 x 43.125 x 15
(W) Width (IN)	15.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	13.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	40.3 x 109.5 x 12.7
(W) Width (CM)	40.3
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	33.7
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	26.7

**Electrical**

Amps	14.2
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 5-15P
Voltage	120
Watts	1700

Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

Case Lot Measurement

PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CVT4 14" LOAD-UP TRAY	B300054
SWITCH 120 V	B401101
LABEL RESET CT4	B401425
SHAFT DRIVE 10.5"	B401340
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300

Name	Part #
CONTROL SPEED 250 OHM CT4	B200900
14 Ga Straight Strain Relief	B400320
MOTOR DRIVE 120V RMS 345	B401200
CT4 TOAST CHUTE	B300012
SHAFT IDLER 10.5"	B401341
CORD POWER 14/3 60" 5-15 PLUG	B401052
MOTOR FAN	B401209
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
CVT4 14" UNLOAD TRAY	B300053
11-TOOTH SPROCKET	B401301
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CT4H HEAT SHUTTER	B300058
BEARING, TEFLON 5/16	B401355
LADDER CHAIN 14.5"	B401398
LEGS BLACK 1" 1/4-20	B400300
1 1/4" SNAP BUSHING	B400330



DISCONTINUED

## Convertible Toaster

Vollrath's Convertible Conveyor Toasters quickly and easily convert from standard toaster to pass-through, offering the benefits of two units in the footprint of one. They provide the flexibility for medium volume restaurants to toast bread and bagels as well as toast sandwiches and melt cheese in one unit.

Forced convection promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power



Variable speed control to achieve desired color

Variable top and bottom heat controls

Provides flexibility to toast bread and bagels as well as toast sandwiches and melt cheese in one unit

Quickly and easily converts from standard toaster to pass-through



## PRODUCT SPECIFICATIONS

### Model Information

Model	JT2HC
UPC	671080705873

### Unit Dimensions

Overall Dimensions (IN)	15.875 x 43.125 x 15
-------------------------	----------------------

(W) Width (IN)	15.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	13.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	40.3 x 109.5 x 12.7
(W) Width (CM)	40.3
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	33.7
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	26.7

## Electrical

Amps	13.5
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	208
Watts	2800

## Construction

Countertop or Drop-In

Countertop

Food Type

Standard Breads, Specialty Breads, Buns,  
Bagels

## Case Lot Measurement

## PRODUCT PARTS

### Name

### Part #

SILVER PUSH-ON KNOB W/SET SCRW

B405019

LABEL CONTROL CT4

B401401

SILVER PUSH-ON KNOB

B405018

SPRING .038" DIA 2.462" LENGTH

B400260

CVT4 14" LOAD-UP TRAY

B300054

CORD FAN HP-75.24-A

B401060

SPROCKET 25B17-8MM

B401300

SWITCH FAN CERAMIC

B401107

MOTOR DRIVE 208/240V RMS 344

B401201

14 Ga Straight Strain Relief

B400320

2PK HEAT ELEM11-3/8 104V 700W

59836

LABEL RESET CT4

B401425

SHAFT DRIVE 10.5"

B401340

BELT WIRE CONVEYOR 10.5"X30"

B204273

CT4 TOAST CHUTE

B300012

11-TOOTH SPROCKET

B401301

CORD POWER 14/3 60" 6-20 PLUG

B401050

CONTROL SPEED 500 OHM CT4

B200901

Name	Part #
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
SHAFT IDLER 10.5"	B401341
LADDER CHAIN 14.5"	B401398
LEGS BLACK 1" 1/4-20	B400300
GUARD FAN	B401220
SWITCH 240 V	B401102
BEARING ASSEMBLY 5/16	B201100
CVT4 14" UNLOAD TRAY	B300053
MOTOR FAN	B401211
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034



## 208-volt JT3HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 900 items per hour, and the convertible design helps you save space without sacrificing quality.

Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 900 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items



PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT3HC
UPC	671080705880

**Unit Dimensions**

Overall Dimensions (IN)	19.875 x 43.125 x 15
(W) Width (IN)	19.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	17.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	50.5 x 109.5 x 12.7
(W) Width (CM)	50.5
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	43.8
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

**Electrical**

Amps	17.3
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	208
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CVT4 18" LOAD-UP TRAY	B300052
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CVT4 18" UNLOAD TRAY	B300051
SWITCH FAN CERAMIC	B401107
TERMINAL BLOCK 5 POSITION	B401033



Name	Part #
GUARD FAN	B401220
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
CT4 18" CRUMB TRAY ASSEMBLY	B204278
LABEL RESET CT4	B401425
CT4 18" CONTROL LABEL	B401402
2PK HEAT ELEM 15-3/8 104V 900W	59839
SHAFT DRIVE 14.5"	B401342
11-TOOTH SPROCKET	B401301
CONTROL SPEED 500 OHM CT4	B200901
LADDER CHAIN 14.5"	B401398
LEGS BLACK 1" 1/4-20	B400300
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
MOTOR FAN	B401211
BEARING, TEFLON 5/16	B401355



DISCONTINUED

## Convertible Toasters

Vollrath's Convertible Conveyor Toasters quickly and easily convert from standard toaster to pass-through, offering the benefits of two units in the footprint of one. They provide the flexibility for medium volume restaurants to toast bread and bagels as well as toast sandwiches and melt cheese in one unit.

Forced convection promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power

Variable speed control to achieve desired color

Variable top and bottom heat controls

Provides flexibility to toast bread and bagels as well as toast sandwiches and melt cheese in one unit

Quickly and easily converts from standard toaster to pass-through



## PRODUCT SPECIFICATIONS

### Model Information

Model	JT2HC
UPC	671080705897

### Unit Dimensions

Overall Dimensions (IN)	15.875 x 43.125 x 15
-------------------------	----------------------

(W) Width (IN)	15.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	13.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	40.3 x 109.5 x 12.7
(W) Width (CM)	40.3
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	33.7
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	26.7

## Electrical

Amps	12.7
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	220
Watts	2800

## Construction

Countertop or Drop-In

Countertop

Food Type

Standard Breads, Specialty Breads, Buns,  
Bagels

## PRODUCT PARTS

### Name

### Part #

SILVER PUSH-ON KNOB W/SET SCRW

B405019

LABEL CONTROL CT4

B401401

SILVER PUSH-ON KNOB

B405018

SPRING .038" DIA 2.462" LENGTH

B400260

CVT4 14" LOAD-UP TRAY

B300054

CORD FAN HP-75.24-A

B401060

SPROCKET 25B17-8MM

B401300

SWITCH FAN CERAMIC

B401107

MOTOR DRIVE 208/240V RMS 344

B401201

14 Ga Straight Strain Relief

B400320

CT4 TOAST CHUTE

B300012

LABEL RESET CT4

B401425

SHAFT DRIVE 10.5"

B401340

GUARD FAN

B401220

SHAFT IDLER 10.5"

B401341

2PK HEAT ELEM 11-3/8 110V 700W

59838

LADDER CHAIN 14.5"

B401398

11-TOOTH SPROCKET

B401301

CORD POWER 14/3 60" 6-20 PLUG

B401050

CONTROL SPEED 500 OHM CT4

B200901

Name	Part #
SWITCH 240 V	B401102
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
BELT WIRE CONVEYOR 10.5"X30"	B204273
CVT4 14" UNLOAD TRAY	B300053
MOTOR FAN	B401211
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
LEGS BLACK 1" 1/4-20	B400300
TERMINAL BLOCK 2 POSITION	B401034



## 220-volt JT3HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 900 items per hour, and the convertible design helps you save space without sacrificing quality.

Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Made in the USA

NSF-certified

Accommodates up to 900 items per hour

½- to 3-inch adjustable product opening fits bread, buns, bagels and other high-clearance items easily

Please note this is a made-to-order item. These items require additional time for fulfillment. Made-to-order items cannot be changed, canceled or returned and may be subject to a minimum-order quantity. Contact your Vollrath sales representative for details.





PRODUCT SPECIFICATIONS

Model Information

Model	JT3HC
UPC	671080705903

Unit Dimensions

Overall Dimensions (IN)	19.875 x 43.125 x 15
(W) Width (IN)	19.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	17.25
(DL) Depth between legs	14

Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	50.5 x 109.5 x 12.7
(W) Width (CM)	50.5
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	43.8
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

## Electrical

Amps	16.4
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	220
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CORD POWER 12/3 60" 6-30P	B401051
CVT4 18" LOAD-UP TRAY	B300052
SWITCH FAN CERAMIC	B401107
2PK HEAT ELEM 15-3/8 110V 900W	59840
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
MOTOR DRIVE 208/240V RMS 344	B401201
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
LADDER CHAIN 14.5"	B401398
CVT4 18" UNLOAD TRAY	B300051
SHAFT DRIVE 14.5"	B401342
11-TOOTH SPROCKET	B401301
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
CT4 18" TOAST CHUTE	B300013

Name	Part #
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING ASSEMBLY 5/16	B201100
CT4 18" CONTROL LABEL	B401402
MOTOR FAN	B401211
STRGHT 12 GA STRAIN RLF BSHNG	B400321
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
CT4H 18" HEAT SHUTTER	B300059
BEARING, TEFLON 5/16	B401355
1 1/4" SNAP BUSHING	B400330
LEGS BLACK 1" 1/4-20	B400300



DISCONTINUED

## Convertible Toasters

Vollrath's Convertible Conveyor Toasters quickly and easily convert from standard toaster to pass-through, offering the benefits of two units in the footprint of one. They provide the flexibility for medium volume restaurants to toast bread and bagels as well as toast sandwiches and melt cheese in one unit.

Forced convection promotes uniform results and energy efficiency

Energy efficient, fast reacting, quartz heaters

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows unit to quickly return to full power

Variable speed control to achieve desired color

Variable top and bottom heat controls

Provides flexibility to toast bread and bagels as well as toast sandwiches and melt cheese in one unit

Quickly and easily converts from standard toaster to pass-through



## PRODUCT SPECIFICATIONS

### Model Information

Model	JT2HC
UPC	671080705910

### Unit Dimensions

Overall Dimensions (IN)	15.875 x 43.125 x 15
-------------------------	----------------------

(W) Width (IN)	15.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	13.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	10.5
Overall Dimensions (CM)	40.3 x 109.5 x 12.7
(W) Width (CM)	40.3
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	33.7
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	26.7

## Electrical

Amps	11.7
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	240
Watts	2800

## Construction

Countertop or Drop-In

Countertop

Food Type

Standard Breads, Specialty Breads, Buns,  
Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
LABEL CONTROL CT4	B401401
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
LABEL RESET CT4	B401425
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260
CVT4 14" LOAD-UP TRAY	B300054
SHAFT DRIVE 10.5"	B401340
GUARD FAN	B401220
SWITCH 240 V	B401102
2PK HEAT ELEM 11-3/8 120V 700W	59854
SWITCH FAN CERAMIC	B401107
BELT WIRE CONVEYOR 10.5"X30"	B204273
SHAFT IDLER 10.5"	B401341
LADDER CHAIN 14.5"	B401398
11-TOOTH SPROCKET	B401301
CORD POWER 14/3 60" 6-20 PLUG	B401050



Name	Part #
CONTROL SPEED 500 OHM CT4	B200901
BEARING FRONT SPRING LOADED	B401350
CVT4 14" UNLOAD TRAY	B300053
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
MOTOR DRIVE 208/240V RMS 344	B401201
14 Ga Straight Strain Relief	B400320
CT4 TOAST CHUTE	B300012
RESET SWITCH	B401100
LEGS BLACK 1" 1/4-20	B400300
MOTOR FAN	B401211
TERMINAL BLOCK 2 POSITION	B401034



## 240-volt JT3HC convertible conveyor toaster

Double your capabilities and increase versatility with the convertible conveyor toaster by Vollrath, which converts from a standard toaster to a pass-through toaster easily and efficiently. Powerful quartz heating elements respond quickly, while forced convection ensures consistent toasting. The variable-speed control and variable top and bottom heat controls help you achieve desired results. Standby mode reduces energy use up to 75 percent during slow periods and quickly returns the unit to full power when needed. The

adjustable 1 ½- to 3-inch product opening fits a variety of items, making this toaster ideal for bread, buns, bagels and more. This convertible conveyor toaster fits up to 900 items per hour, and the convertible design helps you save space without sacrificing quality.

Designed for medium-volume establishments

Quick, easy conversion between standard and pass-through toasting, allowing you to toast bread and bagels as well as toast sandwiches and melt cheese

Variable-speed control and variable top and bottom heat controls help you achieve desired results

Forced convection ensures even toasting

Quartz heating elements respond quickly and save energy

Standby mode saves up to 75 percent energy during slow periods when unit is not in use and allows it to quickly return to full power

Durable stainless and aluminized steel is built to last

Accommodates up to 900 items per hour

1 ½- to 3-inch adjustable product opening easily fits bread, buns, bagels and other high-clearance items



PRODUCT **SPECIFICATIONS**

**Model Information**

Model	JT3HC
UPC	671080705927

**Unit Dimensions**

Overall Dimensions (IN)	19.875 x 43.125 x 15
(W) Width (IN)	19.87
(D) Depth (IN)	43.12
(D2) Secondary Depth (IN)	24.3125
(H) Height (IN)	15
(WL) Width between legs	17.25
(DL) Depth between legs	14
Product Opening Dimensions (IN)	1.5 - 3
Conveyor Width (IN)	14.5
Overall Dimensions (CM)	50.5 x 109.5 x 12.7
(W) Width (CM)	50.5
(D) Depth (CM)	109.5
(D2) Secondary Depth (CM)	61.7
(H) Height (CM)	12.7
(WL) Width between legs (CM)	43.8
(DL) Depth between legs (CM)	35.6
Product Opening Dimensions (CM)	3.8 - 7.6
Conveyor Width (CM)	36.8

**Electrical**

Amps	15
Cord Length (IN)	48
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-30P
Voltage	240
Watts	3600

## Construction

Countertop or Drop-In	Countertop
Food Type	Standard Breads, Specialty Breads, Buns, Bagels

## Case Lot Measurement

## PRODUCT PARTS

Name	Part #
SHAFT IDLER 14.5"	B401343
SILVER PUSH-ON KNOB W/SET SCRW	B405019
CORD FAN HP-75.24-A	B401060
SPROCKET 25B17-8MM	B401300
CVT4 18" LOAD-UP TRAY	B300052
MOTOR DRIVE 208/240V RMS 344	B401201
CORD POWER 12/3 60" 6-30P	B401051
CVT4 18" UNLOAD TRAY	B300051
SILVER PUSH-ON KNOB	B405018
SPRING .038" DIA 2.462" LENGTH	B400260

Name	Part #
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SWITCH 240 V	B401102
CT4 18" TOAST CHUTE	B300013
SWITCH FAN CERAMIC	B401107
WIRE CONVEYOR BELT 14.5"X29.5"	B204277
LADDER CHAIN 14.5"	B401398
SHAFT DRIVE 14.5"	B401342
11-TOOTH SPROCKET	B401301
CONTROL SPEED 500 OHM CT4	B200901
LABEL RESET CT4	B401425
CT4 18" CONTROL LABEL	B401402
CT4 18" CRUMB TRAY ASSEMBLY	B204278
BEARING FRONT SPRING LOADED	B401350
RESET SWITCH	B401100
STRGHT 12 GA STRAIN RLF BSHNG	B400321
BEARING ASSEMBLY 5/16	B201100
SWITCH ROTARY POWER SAVER	B401103
TERMINAL BLOCK 2 POSITION	B401034
LEGS BLACK 1" 1/4-20	B400300
CT4H 18" HEAT SHUTTER	B300059
1 1/4" SNAP BUSHING	B400330
BEARING, TEFLON 5/16	B401355
2PK HEAT ELEM 15-3/8 120V 900W	59841
MOTOR FAN	B401211



## 208-volt vertical contact toaster

Toast up to 1400 bun slices per hour with the vertical contact toaster by Vollrath. This toaster features dual-sided aluminum platen that ensures perfectly crisp results and heavy-duty metal-sheathed heating elements with thermostatic controls for impressive precision. Two openings offer maximum loading capacity, while independent variable-speed controls provide versatility. The vertical design saves precious counter space, and the stainless steel construction is sleek, durable and easy to clean.

Designed to save space on the flattop in high-volume applications like busy restaurants

Dual-sided aluminum platen toasts buns smoothly to help them support juicy burgers or sauces

Heavy-duty metal-sheathed heating elements are thermostatically controlled and promise consistent, accurate heat

Auxiliary heating elements warm crown and heel for a more consistent toast

Two openings offer maximum loading capacity

Independent variable-speed controls provide versatility for each side

Vertical design saves precious counter space

Stainless steel construction is impressively durable


Release sheet is easy to clean and replace

NSF-certified


½- to 1-inch product opening can be adjusted with spring-loaded pressure plate to accommodate a variety of bun sizes

208V

## PRODUCT SPECIFICATIONS

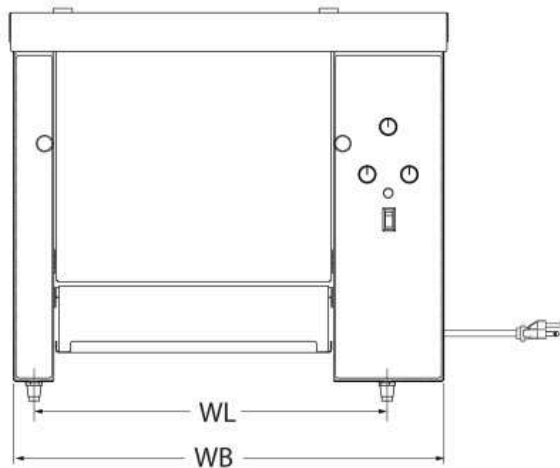


FRONT VIEW

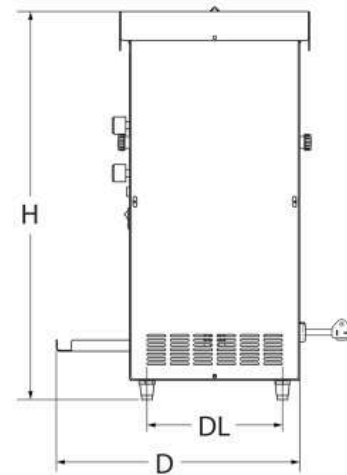

SIDE VIEW



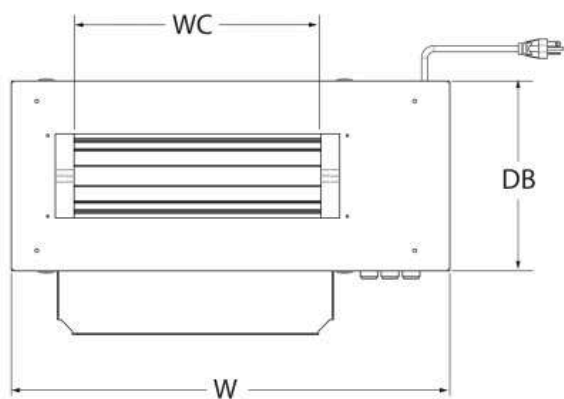

TOP VIEW

## Model Information

Model	CBT15
UPC	671080720548

## Unit Dimensions

Overall Dimensions (IN)	23 x 13 x 20.75
(W) Width (IN)	23.37
(D) Depth (IN)	13
(H) Height (IN)	20.75
(WL) Width between legs	18.875
(DL) Depth between legs	7.25
Product Opening Dimensions (IN)	0.5 - 1
(WC) Cooking Chamber Width (IN)	13.187
(WB) Width of Body (IN)	23
(DB) Depth of Body (IN)	10.187
Overall Dimensions (CM)	58.4 x 33 x 52.7

(W) Width (CM)	59.4
(D) Depth (CM)	33
(H) Height (CM)	52.7
(WL) Width between legs (CM)	48
(DL) Depth between legs (CM)	18.4
Product Opening Dimensions (CM)	1.3 - 2.5
(WC) Cooking Chamber Width (CM)	33.5
(WB) Width of Body (CM)	58.4
(DB) Depth of Body (CM)	26

### Electrical

Amps	15.4
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	208
Watts	3200

### Construction

Countertop or Drop-In	Countertop
Food Type	Buns

### Case Lot Measurement

### PRODUCT ACCESSORIES

Name	Item #
Set of two replacement release sheets for vertical contact toasters	351032
Butter Wheel for CBT-15	351034

PRODUCT **PARTS**

Name	Part #
SILVER PUSH-ON KNOB W/SET SCRW	B405019
30 AMP CONTROL	B401121
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
BEARING SPRING LOADED	B401353
SWITCH FAN CERAMIC	B401107
CORD POWER 12/3 6-20P	B401053
LABEL CONTACT TOASTER	B401438
METAL ELEMENT 208V 1900W	B403035
CHAIN LADDER 14"	B401499
POT ASSEMBLY	B401122
68C RESET SWITCH	B405028
SPRING EXTENSION STEEL	B400266
SWITCH MICRO SNAP ACTION	B401129
SPRING .038" DIA 1.500" LENGTH	B400261
HEAT PLANTIN PRECISION	B401439
32-TOOTH SPROCKET	B401302
SPROCKET 25B17-3/8	B401303
KNOB STUD PHENOLIC	B401188
MOTOR DRIVE 208/240V REVERSED	B401203

Name	Part #
PILOT LIGHT - AMBER 250V	23066-3
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220
SHAFT DRIVE	B401379
LEGS BLACK 1" 1/4-20	B400300
BEARING ASSEMBLY 3/8"	B201101
STRGHT 12 GA STRAIN RLF BSHNG	B400321
THERMISTOR PROBE	B401120
METAL ELEMENT 208V 675W	B403036
TERMINAL BLOCK 2 POSITION	B401034
WIRE CONVEYOR BELT 14" X 26.5"	B205144
VCT4 BEARING HOUSING	B300651
CORD WARNING LABEL	B401404
VCT4 TOP ASSM	B205140
CONTROL SPEED 500 OHM CT4	B200901
ROD, VCT4 CONTACT TOASTER	B401700
BEARING, TEFLON 3/8 REV C	B401357
VCT4 SIDE PANEL	B300636
VCT LEFT SIDE LABEL	B405031
VCT4 TOP COVER	B300634
SHAFT ILDER	B401380
MOTOR FAN	B401211
7/8 WIRE CLAMP	B400331



## 240-volt vertical contact toaster

Toast up to 1400 bun slices per hour with the vertical contact toaster by Vollrath. This toaster features dual-sided aluminum platen that ensures perfectly crisp results and heavy-duty metal-sheathed heating elements with thermostatic controls for impressive precision. Two openings offer maximum loading capacity, while independent variable-speed controls provide versatility. The vertical design saves precious counter space, and the stainless steel construction is sleek, durable and easy to clean.

Designed to save space on the flattop in high-volume applications like busy restaurants

Dual-sided aluminum platen toasts buns smoothly to help them support juicy burgers or sauces

Heavy-duty metal-sheathed heating elements are thermostatically controlled and promise consistent, accurate heat

Auxiliary heating elements warm crown and heel for a more consistent toast

Two openings offer maximum loading capacity

Independent variable-speed controls provide versatility for each side

Vertical design saves precious counter space

Stainless steel construction is impressively durable


Release sheet is easy to clean and replace

NSF-certified


½- to 1-inch product opening can be adjusted with spring-loaded pressure plate to accommodate a variety of bun sizes

240V


## PRODUCT SPECIFICATIONS

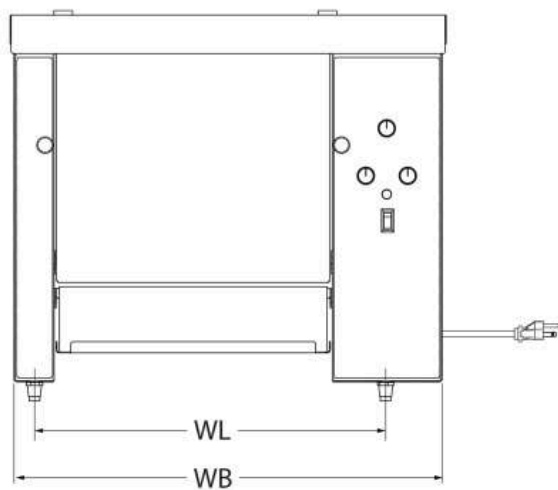

FRONT VIEW

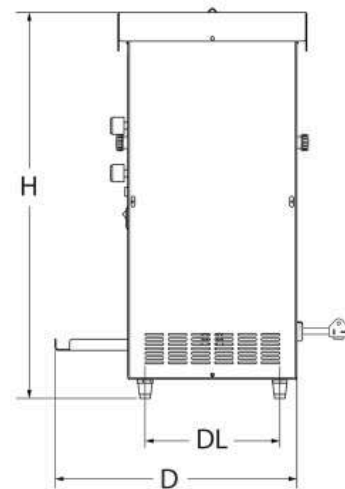

SIDE VIEW

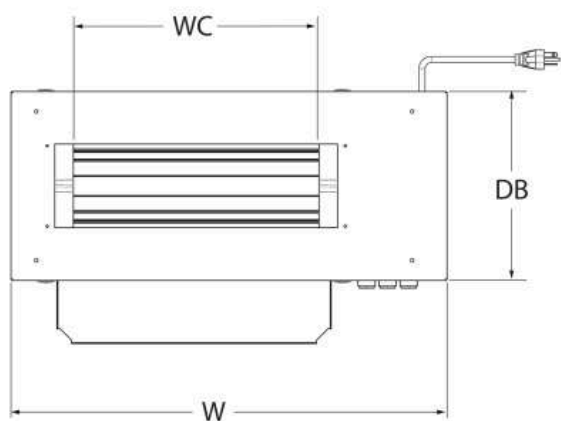

TOP VIEW

## Model Information

Model	CBT15
UPC	671080720555

## Unit Dimensions

Overall Dimensions (IN)	23 x 13 x 20.75
(W) Width (IN)	23.37
(D) Depth (IN)	13
(H) Height (IN)	20.75
(WL) Width between legs	18.875
(DL) Depth between legs	7.25
Product Opening Dimensions (IN)	0.5 - 1
(WC) Cooking Chamber Width (IN)	13.187
(WB) Width of Body (IN)	23
(DB) Depth of Body (IN)	10.187
Overall Dimensions (CM)	58.4 x 33 x 52.7

(W) Width (CM)	59.4
(D) Depth (CM)	33
(H) Height (CM)	52.7
(WL) Width between legs (CM)	48
(DL) Depth between legs (CM)	18.4
Product Opening Dimensions (CM)	1.3 - 2.5
(WC) Cooking Chamber Width (CM)	33.5
(WB) Width of Body (CM)	58.4
(DB) Depth of Body (CM)	26

### Electrical

Amps	13.3
Cord Length (IN)	54
Cord Length (CM)	140
Hz	60
Plug	NEMA 6-20P
Voltage	240
Watts	3200

### Construction

Countertop or Drop-In	Countertop
Food Type	Buns

### Case Lot Measurement

### PRODUCT ACCESSORIES



Name	Item #
Set of two replacement release sheets for vertical contact toasters	351032
Butter Wheel for CBT-15	351034

## PRODUCT PARTS

Name	Part #
CORD POWER 12/3 6-20P	B401053
LABEL CONTACT TOASTER	B401438
KNOB STUD PHENOLIC	B401188
SILVER PUSH-ON KNOB W/SET SCRW	B405019
30 AMP CONTROL	B401121
MOTOR DRIVE 208/240V RMS 344	B401201
CORD FAN HP-75.24-A	B401060
BEARING SPRING LOADED	B401353
SWITCH FAN CERAMIC	B401107
CHAIN LADDER 14"	B401499
POT ASSEMBLY	B401122
68C RESET SWITCH	B405028
SPRING EXTENSION STEEL	B400266
SWITCH MICRO SNAP ACTION	B401129
SPRING .038" DIA 1.500" LENGTH	B400261
HEAT PLANTIN PRECISION	B401439
32-TOOTH SPROCKET	B401302
SPROCKET 25B17-3/8	B401303
TERMINAL BLOCK 5 POSITION	B401033
GUARD FAN	B401220

Name	Part #
PILOT LIGHT - AMBER 250V	23066-3
THERMISTOR PROBE	B401120
METAL ELEMENT 240V 675W	B403039
TERMINAL BLOCK 2 POSITION	B401034
MOTOR DRIVE 208/240V REVERSED	B401203
SHAFT DRIVE	B401379
SHAFT ILDER	B401380
LEGS BLACK 1" 1/4-20	B400300
BEARING ASSEMBLY 3/8"	B201101
STRGHT 12 GA STRAIN RLF BSHNG	B400321
MOTOR FAN	B401211
METAL ELEMENT 240V 1900W	B403038
ROD, VCT4 CONTACT TOASTER	B401700
CONTROL SPEED 500 OHM CT4	B200901
WIRE CONVEYOR BELT 14" X 26.5"	B205144
VCT4 BEARING HOUSING	B300651
CORD WARNING LABEL	B401404
VCT4 TOP ASSM	B205140
VCT4 SIDE PANEL	B300636
VCT LEFT SIDE LABEL	B405031
BEARING, TEFLON 3/8 REV C	B401357
7/8 WIRE CLAMP	B400331
VCT4 TOP COVER	B300634



По вопросам продаж и поддержки обращайтесь:				
Алматы (727)345-47-04 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47	Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Саранск (8342)22-96-24 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35	Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93
Россия +7(495)268-04-70	Казахстан +7(727)345-47-04	Беларусь +(375)257-127-884	Узбекистан +998(71)205-18-59	Киргизия +996(312)96-26-47

эл.почта: [vha@nt-rt.ru](mailto:vha@nt-rt.ru) || сайт: <https://vollrath.nt-rt.ru/>